

OF THE

ATF 98

IDENTIFICATION NUMBER

COMMANDED BY

R. M. OLSEN, LT. \_\_\_\_\_, U. S. N.

Attached to:

Division,

-Squadron,

## Flotilla,

Commander Service Force, U. S. Pacific **Fleet,**

Naval District,

Commencing 0001, 1 October, 19<sup>63</sup>,  
(zone time and date)

at Pearl Harbor, Hawaii  
(location)

and ending 2400, 31 October, 19 <sup>63</sup>  
(zone time and date)

at Pearl Harbor, Hawaii  
(location)

TO BE FORWARDED DIRECT TO THE BUREAU OF NAVAL PERSONNEL AT THE END OF EACH MONTH



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION HIOW DATE TUE 1 OCT., 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI-BIL-ITY (Miles)	WEATH-ER (Sym-bols)	BAROM-ETER (Inches)	TEMPER-ATURE		CLOUDS			SEA WATER TEMPER-ATURE	WAVES	
	DIREC-TION (True)	SPEED (knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC-TION (True)	HEIGHT (Feet)
01	045	4	10	BKN	30.01	83	70	6	1800	CU			
02	030	4	10	BKN	29.98	82	70	6	1800	CU			
03	030	4	10	BKN	29.98	82	70	6	1800	CU			
04	030	4	10	SCT	29.98	83	70	3	1800	CU			
05	030	4	10	SCT	29.98	83	70	3	1800	CU			
06	030	8	10	SCT	29.99	84	72	4	1800	CU			
07	080	12	10	SCT	29.99	84	74	4	1800	CU			
08	084	15	10	SCT	30.00	84	75	5	1800	CU	82	050	4
09	073	23	10	SCT	30.00	85	76	5	1800	CU	82	050	4
10	073	23	10	SCT	30.00	85	76	5	1800	CU	82	085	4
11	063	15	10	SCT	30.00	85	76	5	1800	CU	82	085	4
12	024	15	10	BKN	30.00	85	76	7	1800	CU	82	085	5
13	024	15	10	BKN	29.98	85	76	6	1800	CU	82	080	5
14	020	12	10	SCT	29.96	85	76	5	1800	CU	82	080	5
15	030	12	10	BKN	29.95	84	77	7	1900	CU	82	080	5
16	085	16	10	SCT	29.96	84	77	5	1800	ST/CU	82	080	4
17	090	20	10	BKN	29.96	84	77	7	1800	ST/CU	82	080	4
18	070	25	10	SCT	29.94	82	80	5	2000	ST/CU	82	070	4
19	070	22	10	SCT	29.95	80	76	5	2000	ST/CU	82	070	4
20	056	20	10	SCT	29.99	80	76	4	2000	ST/CU	82	075	5
21	075	19	10	BKN	29.97	79	76	6	2000	ST/CU	82	070	4
22	070	20	10	SCT	29.98	79	76	4	2000	ST/CU	82	075	5
23	073	21	10	SCT	29.98	79	76	5	2000	ST/CU	82	075	4
24	071	20	10	SCT	30.00	79	76	5	2000	ST/CU	82	075	4

POSITION	ZONE	TIME
0800		
L <u>21-08N</u>	BY <u>3</u>	
λ <u>158-00.6W</u>	BY <u>3</u>	
1200		
L <u>20-57N</u>	BY <u>3</u>	
λ <u>158-19.7W</u>	BY <u>3</u>	
2000		
L <u>21-02N</u>	BY <u>3</u>	
λ <u>158-10 W</u>	BY <u>3</u>	

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA	
FROM	(ZT) (Date)
TO	(ZT) (Date)
SET	
DRIFT	
POSITION BETWEEN FIXES	
MID. L	<u>21-05 N</u>
MID. λ	<u>158-05.3W</u>

MILES STEAMED  
0000-2400

108.5

FUEL CONSUMED  
0000-2400

132.3

## REMARKS

00-04 MOORED PORT SIDE TO U.S.S. QUARAW (ATF-110) AT BERTH A-5, U.S. NAVAL BASE, PEARL HARBOR, HAWAII WITH STANDARD MOORING LINES DOUBLED. RECEIVING MISCELLANEOUS SERVICES FROM THE PIER. SHIPS PRESENT INCLUDE VARIOUS UNITS OF THE U.S. PACIFIC FLEET, YARD AND DISTRICT CRAFT. SOPA IS CINKPACFLT WITH OFFICES ASHORE. MATERIAL CONDITION YOKE IS SET THROUGHOUT THE SHIP.

04-08 MOORED AS BEFORE. <sup>0530</sup> MUSTERED CREW ON STATION. ABSENTEES: NONE. <sup>0553</sup> SET SPECIAL SEA AND ANCHOR DETAIL. <sup>0606</sup> UNDERWAY FROM BERTH A-5 WITH SERIES 44 TARGET SLED ENROUTE TO AREA G-2 IAW COMFLETRAGRU OP-ORD H4-63. COMMENCED STEERING VARIOUS COURSES AT VARIOUS SPEEDS CONFORMING TO PEARL HARBOR CHANNEL. 0615 STREAMED TARGET TO 400 FEET. 0643 ENTERED INTERNATIONAL WATERS. STREAMED TARGET TO <sup>4500</sup> ~~1200~~ FEET. STEADY CSE <sup>0707</sup> ~~0707~~ 158° SPD 6.0 KTS. 0707 1/2 TO 180°, 1/5 TO 12.0 KTS.

APPROVED:

U.S.N. COMMANDING

EXAMINED:

<sup>0530</sup> MUSTERED CREW ON STATION. ABSENTEES: NONE.  
<sup>0553</sup> SET SPECIAL SEA AND ANCHOR DETAIL.  
<sup>0606</sup> UNDERWAY FROM BERTH A-5 WITH SERIES 44 TARGET SLED ENROUTE TO AREA G-2 IAW COMFLETRAGRU OP-ORD H4-63. COMMENCED STEERING VARIOUS COURSES AT VARIOUS SPEEDS CONFORMING TO PEARL HARBOR CHANNEL. 0615 STREAMED TARGET TO 400 FEET. 0643 ENTERED INTERNATIONAL WATERS. STREAMED TARGET TO <sup>4500</sup> ~~1200~~ FEET. STEADY CSE <sup>0707</sup> ~~0707~~ 158° SPD 6.0 KTS. 0707 1/2 TO 180°, 1/5 TO 12.0 KTS.

*Rm Markie, Ensign, USNR*  
*A.H. Facette*

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98THE 1 OCT 63  
(Day) (Date) (Month)

08-12 STEAMING AS BEFORE. 0811 MADE DAILY INSPECTION OF SHIPS MAGAZINES AND SMOKELESS POWDER SAMPLES. CONDITIONS NORMAL. 0845 C/C TO 240°. 0940 C/C TO 270°. 1000 COMMENCED FURNISHING SERVICES TO U.S.S. SAVAGE (DER386) FOR EXERCISE Z-27-G. C/S TO 4.0 KTS. 1046 SECURED FROM GUNNERY EXERCISE. 1155 C/C TO 070°

*E. C. Buch Jr.* LTJG. USNR.

12-16 STEAMING AS BEFORE. 1303 C/C TO 190°. C/S TO 12.0 KTS. 1314 C/C TO 270°. C/S TO 6.0 KTS. 1330 COMMENCED EXERCISE Z-21-G WITH U.S.S. NICHOLAS (DD-449) EXERCISE SHIP. 1330 COMPLETED EXERCISE Z-21-G. C/C TO 090°. C/S TO 12.0 KTS. 1435 C/C TO 135°. C/S TO 6.0 KTS. 1450 C/C TO 090°. 1502 COMMENCED EXERCISE Z-23-G WITH NICHOLAS EXERCISE SHIP. 1545 C/C TO 270°. 1553 SECURED FROM GUNNERY EXERCISES. 1558 C/C TO 070°. C/S TO 8.0 KTS.

*R. M. Markie*, Ensign, USNR

16-20 Steaming as before. 1805 C/S to 4 KT. Heaved in target sled to 1500 ft. 1830 C/S to 8 KT. 1952 C/C to 090°.

*W. H. Shinn* LTJG, USN

20-24 STEAMING AS BEFORE. 2105 C/C TO 063°. 2110 SIGHTED DIAMOND HEAD LIGHT BEARING 049° RANGE 20 MI. 2304 C/C TO 080°. 2324 C/C TO 270°.

*E. C. Buch Jr.* LTJG. USNR.

APPROVED:

*Carl Olson*

U.S.N. COMMANDING

EXAMINED:

*R. H. Racette*

U.S.N. NAVIGATOR



NAVPERS 720 (Rev. 4-56)

U/SS ARIKARA ATF-98 ZONE DESCRIPTION TIOW DATE WED 2 OCT, 19 63  
(Day) (Date) (Month)  
AT/PASSAGE FROM LOCAL OP-AREAS PEARL HARBOR, HAWAII TO P.H.H.R.

ZONE TIME	WIND		VISI- BIL- ITY (Miles)	WEATH- ER (Sym- bols)	BAROM- ETER (Inches)	TEMPER- ATURE		CLOUDS			SEA WATER TEMPER- ATURE	WAVES	
	DIREC- TION (True)	SPEED (knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC- TION (True)	HEIGHT (Feet)
01	042	17	10	SCT	29.97	78	75	5	1800	ST/CL	82	075	4
02	043	19	10	SCT	29.98	78	75	5	1800	ST/CL	82	075	4
03	030	10	10	SCT	29.97	78	75	5	1800	ST/CL	82	075	4
04	030	10	10	SCT	29.97	78	75	5	1800	ST/CL	82	075	4
05	043	10	10	SCT	29.96	78	75	5	1800	ST/CL	82	075	4
06	103	10	10	SCT	29.97	78	75	5	1800	CL	82	075	4
07	103	10	10	SCT	29.99	80	77	5	1800	CL	82	075	4
08	060	12	10	SCT	29.96	80	75	5	1800	CL	82	070	4
09	065	14	10	SCT	29.98	82	76	5	1800	CL	82	065	5
10	075	17	10	SCT	29.97	82	76	5	1800	CL	82	070	5
11	075	18	10	SCT	29.97	81	76	5	1800	CL	82	070	5
12	074	22	10	SCT	30.00	83	78	5	2000	ST/CL	82	075	4
13	064	14	10	SCT	29.99	80	76	4	2000	ST/CL	82	080	4
14	087	16	10	BKN	29.96	83	76	6	2000	ST/CL	82	080	3
15	083	20	10	SCT	29.93	84	77	4	2000	ST/CL	82	070	4
16	083	10	10	SCT	29.95	82	77	4	2000	ST/CL	82	070	4
17	040	8	10	BKN	29.94	80	75	6	1800	CL	82	070	3
18	040	8	10	BKN	29.93	79	73	8	1800	CL			
19	040	5	10	OV	29.92	77	74	10	1800	CL			
20	040	3	10	BKN	29.94	76	74	7	1800	CL			
21	040	3	10	BKN	29.94	77	74	6	1800	CL			
22	040	3	10	BKN	29.95	74	70	6	1800	CL			
23	040	2	10	BKN	29.96	71	68	7	1800	CL			
24	040	2	10	BKN	29.94	71	68	7	1800	CL			

POSITION	ZONE	TIME
0800		
L <u>20-53N</u>		BY <u>3</u>
λ <u>158-17W</u>		BY <u>3</u>
1200		
L <u>21-02N</u>		BY <u>3</u>
λ <u>158-12W</u>		BY <u>3</u>
2000		
L _____		BY _____
λ _____		BY _____

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA	
FROM _____	
(ZT)	(Date)
TO _____	
(ZT)	(Date)
SET _____	
DRIFT _____	
POSITION BETWEEN FIXES	
MID. L	20-57.5N
MID. λ	158-14.5N

MILES STEAMED 0000-2400	9.5
----------------------------	-----

FUEL CONSUMED  
0000-2400  
1302

00-04 STEAMING INDEPENDENTLY OFF THE SOUTH COAST OF OAHU,  
HAWAII IAW. COMFLETRAGRU OP-ORD 40-63 ON CGE <sup>270</sup>~~090~~ SPD 8.0 KTS Rmm  
WITH SERIES -40 TARGET SLED #17115 IN TOW ASTERN ON  
1400 FEET OF WIRE. NOS 1 AND 3 MAIN GENERATORS AND  
NO. 1 AUXILIARY GENERATOR ARE ON THE <sup>MATERIAL CONDITION</sup> LINE. A <sup>YOKO SET</sup> 0020 °C TO Rmm  
<sup>THROUGHOUT SHIP</sup> 090. 0119 °C TO 270°. 0206 °C TO 090. 0307 °C TO 270. Rmm  
0355 °C TO 090.

R M Mackee, Ensign, USNR.

04-08 Steaming as before. 0430 1/2 to 8 KT. 0432 1/2 to 270.  
 0450 1/2 to 10 KT. 0503 1/2 to 200. 0530 1/2 to 212. 0540  
 1/2 to 200. 0604 1/2 to 230. 0703 1/2 to 050. 0709 1/2 to  
 6 KT. 0715 Steamed target sled to 4500 ft. 0736 1/2 to 12 KT.  
 0746 1/2 to 8 KT, 1/2 to 240. 0750 Mustered the crew on  
 stations. Absentees: none.

APPROVED:

ED: *Wm. Olsun* U.S.N.

U.S.N. COMMANDING

EXAMINED:

*J. H. Williams* LTJG, USN  
IN: *P. H. Rattle* U.S.N. NAVIGATOR

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98WED 2 OCT 63  
(Day) (Date) (Month) 19

08-12 STEAMING AS BEFORE. 0822 C/S TO 6.0 KTS.  
 0845 MADE DAILY INSPECTION OF MAGAZINES AND  
 AND SMOKELESS POWDER SAMPLES. CONDITIONS NORMAL.  
 0848 COMMENCED FURNISHING SERVICES TO U.S.S.  
 NICHOLAS (DD449) FOR EXERCISE Z-21-G. 0915 SECURED  
 FROM GUNNERY EXERCISE. 0928 COMMENCED  
 FURNISHING SERVICES TO U.S.S. SPROSTON (DD577)  
 FOR EXERCISE Z-21-G. 1001 C/C TO 060. SECURED  
 FROM GUNNERY EXERCISE WITH SPROSTON. 1007  
 4/5 TO 8.0 KTS.

*E. J. Baker* LTJG. USNR.

12-16 STEAMING AS BEFORE. 1230 C/C TO 180°. 1238 C/C TO 245° C/S TO 5.0 KTS. 1259 COMMENCE EXERCISE Z-21-G WITH USS QUAPAW (ATF-116) EXERCISE SHIP. 1310 SECURED FROM GUNNERY EXERCISES. 1311 C/C TO 070°. 1335 C/S TO 10.0 KTS. 1454 C/C TO 035°. 1533 C/C TO 045°. 1549 C/S TO 4.0 KTS. *Rm*

*Rm Markee*, Ensign, USNR.

16-20 Steaming as before. 1602 Heaved in target sled to 1000 ft. 1632 C/S to 8.0 kts. 1651 C/C to 337. 1654 C/C to 340. Entered Inland Waters. 1655 Set the special sea detail. Commenced maneuvering on various courses and speeds to conform to the channel. 1706 Heaved in target sled to 300 ft. astern. 1714 Passed sea buoys 1 and 2. 1736 Heaved target sled close up astern. 1741 Moored port side to berth A-5, U.S. Naval Base, Pearl Harbor, Hawaii with standard mooring lines doubled. 1745 Secured the special sea detail. 1805 Harbor tug under way with series #40 target sled from astern.

20-29 Moored as before.

APPROVED:

*[Signature]*

U.S.N. COMMANDING

EXAMINED:

*A. H. Racette* Ch Bosn USN

*A. H. Racette* Ch Bosn USN

*A. H. Racette*

U.S.N. NAVIGATOR



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION THOW DATE THUR 3 OCT, 19 63  
 (Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISIBILITY (Miles)	WEATHER (Symbols)	BAROMETER (Inches)	TEMPERATURE		CLOUDS			SEA WATER TEMPERATURE	WAVES	
	DIRECTION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIRECTION (True)	HEIGHT (Feet)
01	040	2	10	SCT	29.93	74	70	5	1800	CU			
02	040	2	10	SCT	29.90	74	70	5	1800	CU			
03	040	3	10	SCT	29.90	74	71	4	1800	CU			
04	040	3	10	SCT	29.90	74	71	4	1800	CU			
05	040	3	10	SCT	29.90	75	71	4	1800	CU			
06	040	3	10	SCT	29.92	76	72	5	1800	CU			
07	040	8	10	SCT	29.94	78	72	5	1800	CU			
08	040	12	10	SCT	29.96	78	72	5	1800	CU	82	050	3
09	086	12	10	SCT	29.98	80	74	5	1800	CU	82	050	3
10	090	14	10	SCT	30.00	85	76	5	1800	CU	82	050	3
11	090	14	10	SCT	29.98	85	76	5	1800	CU	82	050	3
12	090	10	10	SCT	29.96	85	76	5	1800	CU	82	050	3
13	090	7	10	SCT	29.94	86	76	5	1800	CU	82	050	3
14	090	7	10	SCT	29.92	86	76	5	1800	CU	82	050	3
15	005	6	10	SCT	29.90	87	77	5	1800	CU			
16	005	4	10	SCT	29.89	87	77	5	1800	CU			
17	005	4	10	SCT	29.91	87	77	5	1800	CU			
18	005	4	10	BRN	29.94	83	74	7	1800	CU			
19	040	8	10	BRN	29.97	79	71	7	1800	CU	82	085	3
20	080	8	10	SCT	29.97	79	71	5	1800	CU	82	085	3
21	080	8	10	SCT	30.00	79	71	5	1800	CU	82	085	3
22	060	10	10	SCT	30.00	78	70	5	1800	CU	82	085	3
23	060	10	10	SCT	29.98	78	70	5	1800	CU	82	085	3
24	060	10	10	SCT	29.96	79	71	5	1800	CU	82	085	3

POSITION	ZONE	TIME
0800		
L <u>21-16 N</u>	BY <u>3</u>	
λ <u>157-56.3 W</u>	BY <u>3</u>	
1200		
L <u>21-15 N</u>	BY <u>3</u>	
λ <u>157-58 W</u>	BY <u>3</u>	
2000		
L <u>21-10 N</u>	BY <u>3</u>	
λ <u>157-54 W</u>	BY <u>3</u>	

LEGEND: 1 - CELESTIAL  
 2 - ELECTRONIC  
 3 - VISUAL  
 4 - D. R.

CURRENT DATA	
FROM _____	(ZT) (Date)
TO _____	(ZT) (Date)
SET _____	
DRIFT _____	
POSITION BETWEEN FIXES	
MID. L <u>21-13 N</u>	
MID. λ <u>157-55.1 W</u>	

MILES STEAMED 0000-2400
<u>71</u>

FUEL CONSUMED 0000-2400
<u>946</u>

## REMARKS

00-04 Moored portside to berth A-5, U.S. Naval Base Pearl Harbor, Hawaii with standard mooring lines doubled. Receiving miscellaneous services from the pier. Material Condition Upke is set. Ships present include various units of the U.S. Pacific Fleet, Yard and District Craft. SOPA is CINCPACFLT.

A. H. Racette CH Bosn USN

04-08 Moored as before. 0705 Mustered the crew at quarters. Absentees: none. 0722 Set the special sea detail. 0734 Underway for local OP AREA in accordance with COMFLTACRU OP ORDER 40-63. Commenced maneuvering on various courses and speeds to conform to the channel. 0750 Passed buoy 1 and 2. 0755 Secured the special sea detail. 0757 Entered International waters. Set base course 155, speed 8.0 kts.

APPROVED:

[Signature]  
 U.S.N. COMMANDING

EXAMINED:

A. H. Racette CH Bosn USN  
A. H. Racette  
 U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98THUR 3 OCT, 1963  
(Day) (Date) (Month)

08-12 STEAMING AS BEFORE. 0804 C/C TO 270°. 0813 MADE DAILY INSPECTION OF MAGAZINES AND SMOKELESS POWDER SAMPLES. CONDITIONS NORMAL. MADE WEEKLY TEST OF MAGAZINE SPRINKLING SYSTEM. TEST SATISFACTORY. 0902 COMMENCED FURNISHING SERVICES TO U.S.S. QUAPAW (ATF110) FOR EXERCISE Z-10-CC, MANEUVERING ON VARIOUS COURSES AND SPEEDS. 1004 SECURED FROM Z-10-CC. 1021 C/S TO ALL STOP. 1036 COMMENCED EXERCISE Z-6-S, QUAPAW APPROACHING PORT SIDE TO PASS MESSENGER. 1050 TOWING HAWSER FAST. 1051 TAKEN IN TOW BY QUAPAW. 1120 CAST OFF TOW WIRE. 1126 ALL LINES CLEAR. COMMENCING APPROACH TO TAKE QUAPAW IN TOW. 1142 PASSED MESSENGER TO QUAPAW. 1154 TOW WIRE FAST. 1157 QUAPAW CAST OFF TOW WIRE.

*E. C. Buck* LTJG. USNR.

12-16 STEAMING AS BEFORE. 1203 COMPLETED EXERCISE Z-6-S. C/C TO 281°. 1206 C/C TO 191°. 1215 COMMENCED STEERING VARIOUS COURSES AT VARIOUS SPEEDS TO COMPENSATE STEERING COMPASS. 1413 SECURED FROM COMPENSATING COMPASS. STEADY CSE 085 SPD 12.8 KTS. 1417 C/C TO 066°. 1429 C/C TO 333°. SET SPECIAL SEA AND ANCHOR DETAIL. 1432 ENTERED INLAND WATERS. COMMENCED STEERING VARIOUS COURSES AT VARIOUS SPEEDS CONFORMING TO PEARL HARBOR CHANNEL. 1438 PASSED BUOY 1 ABEAM TO PORT. 1453 MOORED PORT SIDE TO BERTH A-5 U.S. NAVAL BASE PEARL HARBOR, HAWAII. 1458 SECURED SEA DETAIL.

*B. M. Markee*, Ensign, USNR.

16-20 Moored as before. 1744 Set Special Sea and Anchor Detail. 1801 Underway from berth A-5, U.S. Naval Base, Pearl Harbor, Hawaii to local operating areas with S-40 target sled in accordance with COMFLETRAGRV OP ORDER 40-63. Steaming at various courses and speeds to conform with channel. 1812 Streamed sled to 200 ft. 1820 Streamed sled to 400 ft. 1827 Passed buoys 1 and 2 abeam. 1830 Secured Special Sea and Anchor Detail. 1837 Streamed sled to 1300 ft. 1844 Entered International Waters, steaming on CS 153, sp 4 KT. 1855 C/S to 6 KT. 1920 C/C to 183. 1932 C/C to 153.

20-24 STEAMING AS BEFORE. 2040 C/C TO 270°. 2143 C/C TO 090°. 2345 C/C TO 270°.

*E. C. Buck* LTJG. USNR.

APPROVED:

*W. C. Olson*

U.S.N. COMMANDING

EXAMINED:

*R. H. Rattle*

U.S.N. NAVIGATOR



## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION +10W DATE FRI 4 OCT, 19 63  
 (Day) (Date) (Month)

AT/PASSAGE FROM LOCAL OP-AREAS P.H.H. TO

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI-BIL-ITY (Miles)	WEATH-ER (Sym-bols)	BAROM-ETER (Inches)	TEMPER-ATURE		CLOUDS			SEA WATER TEMPER-ATURE	WAVES	
	DIREC-TION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC-TION (True)	HEIGHT (Feet)
01	090	8	10	SCT	29.96	80	74	5	1800	CU	92	090	4
02	090	12	10	SCT	29.94	80	74	5	1800	CU	82	090	4
03	090	8	10	SCT	29.94	80	74	5	1800	CU	82	090	4
04	085	7	10	SCT	29.96	79	75	5	1800	CU	82	090	3
05	077	10	10	BKN	29.97	79	75	9	1800	CU	82	080	4
06	079	9	10	L	29.98	76	74	10	1800	CU	82	080	3
07	079	9	10	OVC	29.98	76	74	10	1800	CU	82	080	3
08	080	9	10	OVC	29.98	76	74	10	1800	CU	82	080	3
09	080	9	10	SCT	30.00	78	75	5	1800	CU	82	080	3
10	080	9	10	SCT	30.02	78	75	5	1800	CU	82	080	3
11	080	9	10	SCT	30.04	78	75	5	1800	CU	82	080	3
12	080	9	10	SCT	30.00	87	77	5	1800	CU	82	080	3
13	030	7	10	SCT	29.96	87	77	5	1800	CU	82	080	3
14	030	5	10	SCT	29.92	85	75	5	1800	CU			
15	030	5	10	SCT	29.92	85	75	5	1800	CU			
16	040	4	10	SCT	29.94	86	75	5	1800	CU			
17	040	4	10	SCT	29.95	85	75	5	1800	CU			
18	040	3	10	SCT	29.95	83	78	5	1800	CU			
19	040	3	10	SCT	29.97	80	78	5	1800	CU			
20	040	2	10	BKN	29.98	83	78	7	1800	CU			
21	040	2	10	BKN	29.99	82	76	7	1800	CU			
22	090	2	10	R	29.99	82	76	10	1800	CU			
23	090	2	10	BKN	29.98	76	72	7	1800	CU			
24	090	2	10	BKN	29.98	76	72	7	1800	CU			

POSITION	ZONE	TIME
0800		
L <u>20-57 N</u>	BY <u>3</u>	
λ <u>158-19.7 W</u>	BY <u>3</u>	
1200		
L <u>21-12.5 N</u>	BY <u>3</u>	
λ <u>157-58.3 W</u>	BY <u>3</u>	
2000		
L _____	BY _____	
λ _____	BY _____	

LEGEND: 1 - CELESTIAL  
 2 - ELECTRONIC  
 3 - VISUAL  
 4 - D. R.

CURRENT DATA	
FROM _____	(ZT) _____ (Date) _____
TO _____	(ZT) _____ (Date) _____
SET _____	
DRIFT _____	
POSITION BETWEEN FIXES	
MID. L <u>21-04.7 N</u>	
MID. λ <u>158-09 W</u>	

MILES STEAMED 0000-2400
<u>78</u>
FUEL CONSUMED 0000-2400
<u>500</u>

## REMARKS

00-04 STEAMING INDEPENDENTLY OFF THE SOUTH COAST OF OAHU, HAWAII  
 TAW COMPLETRAGRU OP-ORD 48-63 ON USE 270° SPD 6.0 KTS  
 WITH SERIES-40 TARGET SLED NO. 17115 IN TOW ASTERN ON  
 1400 FEET OF WIRE. NOS. 2 AND 3 MAIN GENERATORS AND  
 NO 1 AUXILIARY GENERATOR ARE ON THE LINE. MATERIAL CONDITION YORE SET THROUGHOUT SHIP RMM  
 090° 0300 °C TO 270°

R.M. Marku, Ensign, USNR

04-08 Steaming as before. 0400 °C to 090. 0431 °C to 270. 0455  
 °C to 10 KT, °C to 208. 0559 °C to 218. 0700 °C to 038. 0709  
 °C to 6 KT, steamed sled to 4500 ft. 0718 °C to 270. 0730  
 °C to 205. 0737 °C to 270. 0738 °C to 5 KT. 0749 °C to 6 KT.  
 0755 Mustered the crew on station. Absentees: none.

APPROVED:

[Signature]  
 U.S.N. COMMANDING

EXAMINED:

[Signature] LTJG USN  
A.H. Laetle  
 U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98FRI 4 OCT, 1963  
(Day) (Date) (Month)

08-12 STEAMING AS BEFORE. 0811 COMMENCED SERVICES TO U.S.S. SAVAGE (DER 386) FOR EXERCISE Z-27-G. 0907 SECURED FROM GUNEX. 0919 C/C TO 100°; C/S TO 12.0 KTS. 0945 C/C TO 040° 1013 C/C TO 027. 1019 C/C TO 050. 1022 R MADE DAILY INSPECTION OF MAGAZINES AND SMOKELESS POWDER SAMPLES. CONDITIONS NORMAL. 1100 C/C TO 028.

*E. C. Beach* LTJG. USNR.

12-16 STEAMING AS BEFORE. 1205 C/C TO 023°. 1231 C/C TO 030°. C/S TO 8.0 KTS. 1253 C/C TO 333°. SET SPECIAL SEA AND ANCHOR DETAIL. 1258 ENTERED INLAND WATERS. COMMENCED STEERING VARIOUS COURSES AND SPEEDS CONFORMING TO PEARL HARBOR CHANNEL. 1306 HEAVED IN TARGET SLED TO 500 FEET. 1314 PASSED BOUY NO 1 ABEAM TO PORT. 1328 HEAVED IN TARGET SLED TO 100 FEET. 1330 HEAVED SLED IN TO 10 FEET. 1332 MOORED STARBOARD SIDE TO BERTH A-3 U.S. NAVAL BASE, PEARL HARBOR, HAWAII. 1340 SECURED SPECIAL SEA AND ANCHOR DETAIL.

*R. M. Markie*, Ensign, USNR

16-20 Manual as before

*B. D. Emme* LTJG USN.

20-24 Manual as before

*B. D. Emme* LTJG USN.

APPROVED:

*Carl Olsen*

U.S.N. COMMANDING

EXAMINED:

*A. H. Lattin*

U.S.N. NAVIGATOR



## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION H10W DATE SAT 5 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI-BIL-ITY (Miles)	WEATH-ER (Sym-bols)	BAROM-ETER (Inches)	TEMPER-ATURE		CLOUDS			SEA WATER TEMPER-ATURE	WAVES	
	DIREC-TION (True)	SPEED (knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC-TION (True)	HEIGHT (Feet)
01	090	3	10	BKN	29.92	76	71	7	1800	CU			
02	090	3	10	BKN	29.92	76	71	7	1800	CU			
03	090	3	10	SCT	29.92	76	71	5	1800	CU			
04	090	3	10	SCT	29.90	79	72	5	1800	CU			
05	040	3	10	SCT	29.90	79	72	5	1800	CU			
06	040	3	10	SCT	29.92	80	73	5	1800	CU			
07	040	3	10	SCT	29.95	81	74	5	1800	CU			
08	040	3	10	SCT	29.98	81	74	3	1800	CU			
09	-	0	10	SCT	29.98	84	76	4	1800	CU			
10	-	0	10	SCT	29.98	86	76	3	1800	CU			
11	-	0	10	SCT	29.98	89	77	5	1800	CU			
12	-	0	10	SCT	29.97	90	78	5	1800	CU			
13	-	0	10	SCT	29.96	90	78	5	1800	CU			
14	-	0	10	SCT	29.94	91	78	5	1800	CU			
15	-	0	10	SCT	29.94	90	78	5	1800	CU			
16	040	2	10	SCT	29.93	89	77	5	1800	CU			
17	040	2	10	SCT	29.92	88	77	5	1800	CU			
18	040	2	10	SCT	29.94	87	77	5	1800	CU			
19	040	2	10	SCT	29.96	79	72	5	1800	CU			
20	-	0	10	SCT	29.96	79	72	5	1800	CU			
21	-	0	10	SCT	29.97	78	72	4	1800	CU			
22	-	0	10	SCT	29.98	78	71	4	1800	CU			
23	-	0	10	SCT	29.97	77	71	4	1800	CU			
24	-	0	10	SCT	29.98	77	71	4	1800	CU			

POSITION	ZONE	TIME
0800		
L	BY	
λ	BY	
1200		
L	BY	
λ	BY	
2000		
L	BY	
λ	BY	

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA	
FROM	(ZT) (Date)
TO	(ZT) (Date)
SET	
DRIFT	
POSITION BETWEEN FIXES	
MID. L	
MID. λ	

MILES STEAMED 0000-2400
0

FUEL CONSUMED 0000-2400
378

## REMARKS

00-04 Moored starboard side to Berth A-3 U.S. Naval Base Pearl Harbor Hawaii with starboard mooring lines doubled. Receiving various services from the pier. Ships present include various units of the U.S. Pacific Fleet, Yeard Harbor and Fleet Craft. SPSA is CINCPACFLT. Material Condition Yank is set.

B.D. Fink LTJG USN.

04-05 Moored as before 0742 Made daily inspection of magazines and smokeless powder supplies. Condition Normal.

B.D. Fink LTJG USN.

APPROVED:

*[Signature]*  
U.S.N. COMMANDING

EXAMINED:

*[Signature]*  
U.S.N. NAVIGATOR



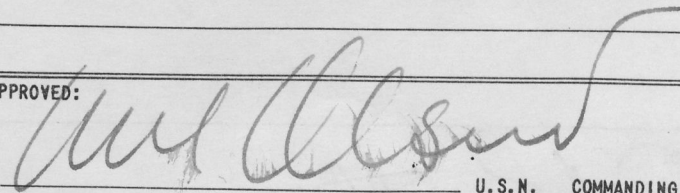
## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98SAT 5 OCT 1963  
(Day) (Date) (Month)

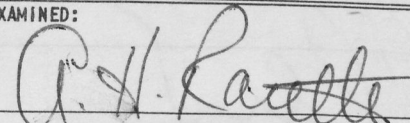
08-12 MOORED AS BEFORE. 0800 MUSTERED CREW ON STATION.  
ABSENTEES: NONE 1100 YTL 553 REMOVED TARGET SLED  
FROM ALONG PORT SIDE. 1112 YTL 553 DELIVERED NO. 590  
SERIES-40 TARGET SLED ALONG PORT SIDE.

Rm Markee, Ensign, USNR12-16 MOORED AS BEFORE.Rm Markee, Ensign, USNR16-20 MOORED AS BEFORE.Rm Markee, Ensign, USNR20-24 MOORED AS BEFORE.Rm Markee, Ensign, USNR

APPROVED:

  
U.S.N. COMMANDING

EXAMINED:

  
U.S.N. NAVIGATOR

TO BE FORWARDED TO THE BUREAU OF NAVAL PERSONNEL AT THE END OF EACH MONTH



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

ISS ARIKARA ATF-98 ZONE DESCRIPTION HIOW DATE SUN 6 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI- BIL- ITY (Miles)	WEATH- ER (Sym- bols)	BAROM- ETER (Inches)	TEMPER- ATURE		CLOUDS			SEA WATER TEMPER- ATURE	WAVES	
	DIREC- TION (True)	SPEED (knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC- TION (True)	HEIGHT (Feet)
01	-	0	10	SCT	29.98	77	72	5	1800	CU			
02	-	0	10	SCT	29.96	77	72	5	1800	CU			
03	-	0	10	SCT	29.94	78	73	5	1800	CU			
04	040	2	10	SCT	29.93	80	73	5	1800	CU			
05	040	2	10	SCT	29.94	80	73	5	1800	CU			
06	040	2	10	SCT	29.94	80	73	5	1800	CU			
07	040	2	10	SCT	29.96	77	72	5	1800	CU			
08	035	2	10	SCT	29.96	80	73	5	1800	CU			
09	035	2	10	SCT	29.98	80	73	5	1800	CU			
10	035	2	10	SCT	29.98	86	75	5	1800	CU			
11	035	2	10	SCT	29.98	86	75	5	1800	CU			
12	035	2	10	SCT	29.99	86	75	5	1800	CU			
13	035	2	10	SCT	29.98	93	81	3	1800	CU			
14	035	2	10	SCT	29.96	92	80	3	1800	CU			
15	035	3	10	SCT	29.94	90	78	4	1800	CU			
16	035	3	10	SCT	29.94	90	78	4	1800	CU			
17	035	3	10	BKN	29.95	90	78	6	1800	CU			
18	035	3	10	BKN	29.95	85	77	6	1800	CU			
19	035	3	10	BKN	29.95	85	77	6	1800	CU			
20	035	3	10	BKN	29.98	85	77	6	1800	CU			
21	035	3	10	BKN	30.02	82	77	6	1800	CU			
22	045	3	10	BKN	30.02	81	76	6	1800	CU			
23	045	3	10	BKN	30.02	81	76	6	1800	CU			
24	045	3	10	BKN	30.00	81	76	6	1800	CU			

POSITION ZONE TIME

0800  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

1200  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

2000  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA

FROM \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)  
TO \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)

SET \_\_\_\_\_  
DRIFT \_\_\_\_\_

POSITION BETWEEN FIXES

MID. L \_\_\_\_\_  
MID. λ \_\_\_\_\_

MILES STEAMED  
0000-2400  
0

FUEL CONSUMED  
0000-2400  
294

## REMARKS

00-04 MOORED STARBOARD SIDE TO BERTH A-3, U.S. NAVAL BASE, PEARL HARBOR, HAWAII WITH STANDARD MOORING LINES DOUBLED. TARGET SLED No. 590 ALONGSIDE TO PORT. RECEIVING MISCELLANEOUS SERVICES FROM THE PIER. SHIPS PRESENT INCLUDE VARIOUS UNITS OF THE U.S. PACIFIC FLEET, YARD AND DISTRICT CRAFT. SOPA IS CINCPACFLT WITH OFFICES ASHORE. MATERIAL CONDITION YOKE IS SET THROUGHOUT THE SHIP.

R.M. Markke, Ensign, USNR

04-08 MOORED AS BEFORE.

R.M. Markke, Ensign, USNR

APPROVED:

U.S.N. COMMANDING

EXAMINED:

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98SUN 6 OCT 1963  
(Day) (Date) (Month)

09-12 Moored as before. 0900 Mustered the crew on stations. Absentees: none. 0905 Made daily inspection of magazines and smokeless powder samples. Conditions: normal.

*J. M. Whinn* LTJG, USN

12-16 Moored as before.

*J. M. Whinn* LTJG, USN

16-20 Moored as before.

*J. M. Whinn* LTJG, USN

20-24 Moored as before.

*J. M. Whinn* LTJG, USN

APPROVED:

*W. J. Bennett*  
U.S.N. COMMANDING

EXAMINED:

*A. H. Latelle*  
U.S.N. NAVIGATOR



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION +10W DATE MON 7 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI-BIL-ITY (Miles)	WEATH-ER (Sym-bols)	BAROM-ETER (Inches)	TEMPER-ATURE		CLOUDS			SEA WATER TEMPER-ATURE	WAVES	
	DIREC-TION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC-TION (True)	HEIGHT (Feet)
01	050	3	10	SCT	30.00	80	71	4	1800	CU			
02	045	3	10	SCT	29.99	80	71	4	1800	CU			
03	045	3	10	SCT	29.98	80	71	4	1800	CU			
04	040	2	10	SCT	29.96	80	71	4	1800	CU			
05	-	0	10	SCT	29.97	80	72	4	1800	CU			
06	-	0	10	SCT	29.98	80	72	4	1800	CU			
07	-	0	10	SCT	29.99	80	72	4	1800	CU			
08	-	0	10	SCT	29.99	80	70	4	1800	CU			
09	-	0	10	SCT	29.99	80	70	4	1800	CU			
10	160	3	10	SCT	30.00	80	70	4	1800	CU	82	050	3
11	140	8	10	SCT	30.00	81	74	5	1800	CU	82	050	3
12	130	14	10	SCT	30.00	79	74	5	1800	CU	82	050	3
13	135	18	10	SCT	29.97	80	74	5	1800	CU	82	050	5
14	070	18	10	SCT	29.94	84	76	5	1800	CU	82	070	5
15	070	15	10	SCT	29.94	80	74	5	1800	CU	82	070	5
16	080	19	10	SCT	29.96	85	77	3	1800	CU	82	070	5
17	080	17	10	SCT	29.97	82	75	3	1800	CU	82	065	4
18	042	24	10	SCT	29.78	79	75	4	1800	CU	82	065	4
19	055	18	10	SCT	30.00	78	74	4	1800	CU	82	065	5
20	077	26	10	SCT	30.00	78	74	4	1800	CU	82	065	5
21	088	20	10	SCT	30.00	78	74	4	1800	CU	82	065	5
22	080	2	10	SCT	30.02	77	72	4	1800	CU	82	065	3
23	040	2	10	SCT	30.02	80	74	5	1800	CU			
24	040	2	10	SCT	30.01	77	72	5	1800	CU			

POSITION ZONE TIME

0800

L \_\_\_\_\_ BY \_\_\_\_\_

λ \_\_\_\_\_ BY \_\_\_\_\_

1200

L 20-56.5N BY 3

λ 158-13.5W BY 3

2000

L 21-12.5N BY 3

λ 157-58.3W BY 3

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA

FROM \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)

TO \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)

SET \_\_\_\_\_

DRIFT \_\_\_\_\_

POSITION BETWEEN FIXES

MID. L 21-04 N

MID. λ 158-05.9 W

MILES STEAMED 0000-2400

104

FUEL CONSUMED 0000-2400

1422

## REMARKS

φφ-φ4 Moored stbd side to berth A-3, U.S. Naval Base, Pearl Harbor, Hawaii with standard mooring lines doubled. Target S-4φ target sled alongside to port. Receiving miscellaneous services from the pier. Ships present include various units of the U.S. Pacific Fleet, yard and district craft. SOPA is CINCPACFLT. Material Condition Yoker is set.

*[Signature]* LTJG, USN

φ4-φ8 Moored as before. φ7φ5 Mustered the crew at quarters. Absentees: none. φ727 Made daily inspection of magazines and smokes powder samples. Conditions: normal. φ74φ Set Special Sea and Anchor Detail.

APPROVED:

*[Signature]*

U.S.N. COMMANDING

EXAMINED:

*[Signature]* LTJG, USN  
*[Signature]* A. H. Racell

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98MON 7 OCT 63  
(Day) (Date) (Month)

0812 Moored as before. 0810 0801 Underway from berth A-5 A-3, U.S. Naval Base, Pearl Harbor, Hawaii to local operating areas with S-40 target sled in accordance with COMFLETRAGRU PEARL OP ORDER 41-63. Steaming at various courses and speeds to conform with channel. 0805 Streamed sled to 400 ft. 1734 Buoys 1 and 2 abeam. 0828 Secured Special Sea and Anchor Detail. 0843 Entered International Waters. Steaming on cs 163, sp 6 KT. 0857 Streamed target sled to 450 ft. 0900 1/2 to 212, 1/2 to 12 KT. 1046 1/2 to 237. 1112 1/2 to 240. 1114 1/2 to 230, 1/2 to 8 KT.

*J. M. White* LTJG, USN

1216 STEAMING AS BEFORE. 1255 COMMENCED SERVICES TO U.S.S. RENSHAW (DD499) FOR EXERCISES Z-21-G. 1316 SECURED FROM EXERCISE. C/C TO 050°. 1439 C/C TO 260°. 1447 COMMENCED SERVICES TO U.S.S. EPPERSON (DD719) FOR EXERCISES Z-24-G (MOD), Z-21-G, AND Z-23-G. 1540 C/C TO 080°.

*E. J. Baker* LTJG, USNR.

1620 STEAMING AS BEFORE. 1635 1/2 to 100 ft. 1645 COMPLETED GUNNERY EXERCISES WITH U.S.S. EPPERSON (DD719). 1649 1/2 to 070. 1907 1/2 to 038.

*R. M. Markee* Ensign, USNR.

2024 Steaming as before. 2015 1/2 to 050. 2104 1/2 to 040. 2120 1/2 to 4 KT. 2140 Set Special Sea and Anchor Detail. 2146 1/2 to 333. 2152 1/2 to 6 KT. Heaved in target sled to 1000 ft. 2159 1/2 to 334. 2200 Entered Inland Waters. Steaming at various courses and speeds to conform with channel. 2208 Heaved in tow to 500 ft. 2213 Buoys 1 and 2 abeam. 2228 Heaved in tow to 100 ft. 2235 Heaved in tow to a short stay. 2237 Moored port side to berth A-5, U.S. Naval Base, Pearl Harbor, Hawaii with standard mooring lines doubled. 2243 Secured Special Sea and Anchor Detail.

*J. M. White* LTJG, USN

APPROVED:

*[Signature]*

U.S.N. COMMANDING

EXAMINED:

*A. H. Rasetto*

U.S.N. NAVIGATOR

TO BE FORWARDED TO THE BUREAU OF NAVAL PERSONNEL AT THE END OF EACH MONTH



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION ±10W DATE TUE 8 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI-BIL-ITY (Miles)	WEATH-ER (Sym-bols)	BAROM-ETER (Inches)	TEMPER-ATURE		CLOUDS			SEA WATER TEMPER-ATURE	WAVES	
	DIREC-TION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC-TION (True)	HEIGHT (Feet)
01	040	2	10	SCT	30.00	81	76	5	1800	CU			
02	040	2	10	BKN	29.99	81	76	8	1800	CU			
03	040	2	10	BKN	29.98	81	76	8	1800	CU			
04	040	2	10	BKN	29.98	83	74	7	1800	CU			
05	040	2	10	BKN	29.98	81	76	6	1800	CU			
06	040	2	10	SCT	29.98	81	76	5	1800	CU			
07	040	2	10	SCT	30.00	81	76	5	1800	CU			
08	040	5	10	SCT	30.00	80	73	4	1800	CU			
09	040	8	10	SCT	30.02	82	74	4	1800	CU			
10	060	10	10	SCT	30.06	80	75	4	1800	CU	82	090	2
11	060	13	10	SCT	30.04	80	75	4	1800	ST/CU	82	090	3
12	060	14	10	BKN	30.04	81	75	7	1800	ST/CU	82	090	2
13	060	12	10	BKN	30.02	80	74	7	1800	ST/CU	82	090	2
14	060	8	10	BKN	29.99	83	74	7	2000	CU			
15	040	5	10	BKN	29.96	85	75	6	2000	CU			
16	040	4	10	BKN	29.96	85	75	6	2000	CU			
17	040	2	10	SCT	29.96	84	75	4	2100	CU			
18	040	2	10	SCT	29.96	83	75	3	2100	CU			
19	040	2	10	SCT	29.99	82	74	3	2100	CU			
20	040	2	10	SCT	29.99	81	73	3	2100	CU			
21	040	2	10	SCT	30.00	78	69	3	2100	CU			
22	040	2	10	SCT	30.00	77	68	3	2100	CU			
23	040	2	10	SCT	30.00	77	68	3	2100	CU			
24	040	2	10	SCT	30.00	76	73	3	2100	CU			

POSITION	ZONE	TIME
0800		
L _____	BY _____	
λ _____	BY _____	
1200		
L <u>21-13.5N</u>	BY <u>3</u>	
λ <u>157-54.5W</u>	BY <u>3</u>	
2000		
L _____	BY _____	
λ _____	BY _____	

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA			
FROM _____	(ZT)	(Date)	
TO _____	(ZT)	(Date)	
SET _____			
DRIFT _____			
POSITION BETWEEN FIXES			
MID. L _____			
MID. λ _____			

MILES STEAMED  
0000-2400

25.0

FUEL CONSUMED  
0000-2400

630

## REMARKS

00-04 Moored port side to berth A-5 U.S. Naval Base, Pearl Harbor, Hawaii with standard mooring lines doubled. Receiving miscellaneous services from the pier. Material Condition Yoke is set. Ships present include various units of the U.S. Pacific Fleet, Yard and District Craft. SOPA is CINCPACFLT.

A.H. Rautte Ch Bosn USN

04-08 Moored as before. 0705 Mustered the crew at quarters. Absentees: REVIERE, L.J., 683-57-86, SA, USN, AWOL since 0700 this date.

A.H. Rautte Ch Bosn USN

APPROVED:

*[Signature]*  
U.S.N. COMMANDING

EXAMINED:

*[Signature]*  
U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98TUE 8 OCT 63  
(Day) (Date) (Month)

08-12 MOORED AS BEFORE. 0802 MADE DAILY INSPECTION OF MAGAZINES AND SMOKELESS POWDER SAMPLES. CONDITIONS NORMAL. 0910 SET SPECIAL SEA AND ANCHOR DETAIL. 0923 UNDERWAY FROM BERTH A5 TO LOCAL OP AREAS IAW COMFLETRAGRU PEARL WEEKLY OPORD 41-63 MANEUVERING VARIOUS COURSES AND SPEEDS TO CONFORM TO THE CHANNEL. 0935 STEADY CSE 153. SPD 12.0 KTS. 0942 SECURED SPECIAL SEA AND ANCHOR DETAIL. 0948 ENTERED INTERNATIONAL WATERS. 0952 C/C TO 180. 1008 COMMENCED MANEUVERING VARIOUS CSES AND SPDS. FOR EXERCISE Z-10-CC WITH U.S.S. BOLSTER (ARS 38). 1115 SECURED FROM Z-10-CC. C/S TO ALL STOP. BOLSTER COMMENCING APPROACH FOR EXERCISE Z-6-S. 1128 MESSENGER PASSED. 1139 TOW WIRE FAST. 1141 TAKEN IN TOW BY BOLSTER.

*E. C. Bach* LTJG. USNR.

12-16 STEAMING AS BEFORE. 1214 BROKE TOW FROM U.S.S. BOLSTER (ARS-38). 1225 ALL LINES CLEAR. 1226 COMMENCED STEERING VARIOUS COURSES AND SPEEDS APPROACHING BOLSTER TO TAKE HER IN TOW IAW EXERCISE Z-6-S. 1254 TOW WIRE FAST ON BOLSTER. 1256 TOW BROKEN. 1302 ALL LINES CLEAR. EXERCISE Z-6-S COMPLETED. STEADY CSE 000° SPD 4.0 KTS. 1321 C/C TO 335°. 1355 C/S TO 12.0 KTS. 1358 C/C TO 333°. 1400 SET SPECIAL SEA AND ANCHOR DETAIL. 1403 ENTERED INLAND WATERS. COMMENCED STEERING VARIOUS COURSES AT VARIOUS SPEEDS CONFORMING TO PEARL HARBOR CHANNEL. 1413 PASSED BOUY No. 1 ABEAM TO PORT. 1432 MOORED BERTH A-5, U.S. NAVAL BASE, PEARL HARBOR, HAWAII WITH STANDARD MOORING LINES DOUBLED. 1434 SECURED SPECIAL SEA DETAIL.

*R. M. Markes*, Ensign, USNR

16-20 MOORED AS BEFORE.

*E. C. Bach* LTJG. USNR.

20-24 MOORED AS BEFORE. 2020 REVIERE, L.J. SA, 683 57 86, USN RETURNED ON BOARD HAVING BEEN <sup>AWOL</sup> ~~VA~~ SINCE 0700 THIS DATE.

*E. C. Bach* LTJG. USNR.

APPROVED:

EXAMINED:

U.S.N. COMMANDING

U.S.N. NAVIGATOR

TO BE FORWARDED TO THE BUREAU OF NAVAL PERSONNEL AT THE END OF EACH MONTH



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION TIOW DATE WED 9 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISIBILITY (Miles)	WEATHER (Symbols)	BAROMETER (Inches)	TEMPERATURE		CLOUDS			SEA WATER TEMPERATURE	WAVES	
	DIRECTION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIRECTION (True)	HEIGHT (Feet)
01	040	2	10	SCT	30.00	76	73	4	1800	CU			
02	040	2	10	SCT	30.00	76	73	4	1800	CU			
03	040	2	10	SCT	30.00	76	73	4	1800	CU			
04	040	1	10	SCT	29.99	77	73	3	1800	CU			
05	-	0	10	SCT	29.99	78	74	3	1800	CU			
06	-	0	10	SCT	29.98	79	74	4	1800	CU			
07	-	0	10	SCT	29.98	75	72	3	1800	CU			
08	-	0	10	SCT	30.02	78	73	2	1800	CU			
09	090	5	10	SCT	30.05	80	75	2	1800	CU			
10	074	7	10	SCT	30.08	80	75	4	1800	CU			
11	075	7	10	SCT	30.06	80	75	5	1800	CU			
12	075	12	10	SCT	30.02	79	73	3	1800	CU	82	045	4
13	070	12	10	SCT	30.01	80	73	3	1800	CU	82	045	3
14	073	14	10	SCT	29.98	82	74	3	1800	CU	82	045	3
15	065	12	10	SCT	29.96	83	75	3	1800	CU	82	045	3
16	065	13	10	SCT	29.93	80	74	3	1800	CU	82	045	3
17	070	12	10	SCT	29.94	80	74	3	1800	CU	82	045	3
18	065	12	10	SCT	29.95	80	74	3	1800	CU	82	045	3
19	040	7	10	SCT	29.97	80	73	3	1800	CU			
20	-	0	10	SCT	29.98	80	73	3	1800	CU			
21	-	0	10	SCT	29.97	79	73	3	1800	CU			
22	-	0	10	SCT	30.00	79	73	3	1800	CU			
23	-	0	10	SCT	30.00	78	73	3	1800	CU			
24	-	0	10	SCT	30.00	78	73	3	1800	CU			

POSITION ZONE TIME  
0800  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_  
1200  
L 20-54.3N BY 3  
λ 157-49.8W BY 3  
2000  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA  
FROM \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)  
TO \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)  
SET \_\_\_\_\_  
DRIFT \_\_\_\_\_  
POSITION BETWEEN FIXES  
MID. L \_\_\_\_\_  
MID. λ \_\_\_\_\_

MILES STEAMED  
0000-2400  
90

FUEL CONSUMED  
0000-2400  
1088

## REMARKS

00-04 MOORED PORT SIDE TO BERTH A5, U.S. NAVAL BASE, PEARL HARBOR, HAWAII WITH STANDARD MOORING LINES DOUBLED, RECEIVING MISC. SERVICES FROM THE PIER. SHIPS PRESENT INCLUDE VARIOUS UNITS OF THE U.S. PACIFIC FLEET, YARD AND DISTRICT CRAFT. MATERIAL CONDITION YOKE IS SET THROUGHOUT THE SHIP. SOFA IS CINCPACFLT.

*E. C. Bach* LTJG. USNR.

04-08 MOORED AS BEFORE. 0705 MUSTERED CREW ON STATION. ABSENTEES: NONE. 0749 MADE DAILY INSPECTION OF MAGAZINES AND SMOKELESS POWDER SAMPLES. CONDITIONS NORMAL.

*E. C. Bach* LTJG. USNR.

APPROVED:

*[Signature]*

U.S.N. COMMANDING

EXAMINED:

*[Signature]*

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98WED 9 OCT 63  
(Day) (Date) (Month)

08-12 Moored as before. 0835 Set Special Sea and Anchor Detail. 0853 Underway from berth, A-5, U.S. Naval Base, Pearl Harbor, Hawaii with 8-40 target sled, in accordance with COMFLETRAGRL PEARL ORDER 41-63, to local operating areas. Steaming at various courses and speeds to conform with channel. 0900 Streamed sled to 400 ft. 0921 Buys 1 and 2 abeam to. 0922 Secured Special Sea and Anchor Detail. 0926 Entered International waters. Steaming on cs 165, sp 6 KT. 0945 Streamed sled to 450 ft, 4s to 12 KT. 1055 4s to 161. 1110 4s to 11 KT.

*[Signature]* LTJG, USN

12-16 STEAMING AS BEFORE. 1315 C/C TO 070 C/S TO 8 KTS. 1353 COMMENCED SERVICES TO U.S.S. NICHOLAS (DD449) FOR EXERCISE Z-21-G. 1459 SECURED FROM EXERCISE. C/C TO 300° 4s TO 12.0 KTS. 1530 C/C TO 340.

*[Signature]* LTJG, USNR

16-20 STEAMING AS BEFORE. 1737 C/C TO 345°. 1806 C/S TO 4.0 KTS. HEAVED IN TARGET SLED TO 1000 FEET. 1810 C/C TO 333°. 1832 C/S TO 8.0 KTS. SET SPECIAL SEA AND ANCHOR DETAIL. 1847 ENTERED INLAND WATERS. COMMENCED STEERING VARIOUS COURSES AT VARIOUS SPEEDS CONFORMING TO PEARL HARBOR CHANNEL. 1853 HEAVED IN SLED TO 400 FEET. 1903 HEAVED IN SLED TO 50 FEET. 1923 <sup>TARGET SLED HEAVED IN CLOSE UP AFTERN.</sup> SLED BROUGHT ALL THE WAY IN. MOORED <sup>Rmm</sup> BERTH A-5, U.S. NAVAL BASE, PEARL HARBOR, HAWAII WITH STANDARD MOORING <sup>LINES</sup> DOUBLED. 1933 SECURED SPECIAL SEA <sup>Rmm</sup> DETAIL.

*[Signature]* RM-Marker, Ensign, USNR.

20-24 Moored as before

*[Signature]* LTJG, USN

APPROVED:

*[Signature]*

U.S.N. COMMANDING

EXAMINED:

*[Signature]*

U.S.N. NAVIGATOR

TO BE FORWARDED TO THE BUREAU OF NAVAL PERSONNEL AT THE END OF EACH MONTH



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION +10W DATE THUR 10 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI-BIL-ITY (Miles)	WEATH-ER (Sym-bols)	BAROM-ETER (Inches)	TEMPER-ATURE		CLOUDS			SEA WATER TEMPER-ATURE	WAVES	
	DIREC-TION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC-TION (True)	HEIGHT (Feet)
01	040	2	10	SCT	29.96	78	73	3	1800	CU			
02	040	2	10	SCT	29.96	75	72	3	1800	CU			
03	040	2	10	SCT	29.94	73	72	3	1800	CU			
04	040	3	10	SCT	29.94	77	72	3	1800	CU			
05	040	3	10	SCT	29.94	77	72	4	1800	CU			
06	045	3	10	SCT	29.96	76	71	5	1800	CU			
07	045	3	10	SCT	29.98	76	71	5	1800	CU			
08	045	3	10	SCT	29.99	78	73	5	1800	CU			
09	045	3	10	SCT	30.00	81	74	5	1800	CU			
10	045	3	10	SCT	30.00	84	75	5	1800	CU			
11	045	3	10	SCT	30.00	88	76	5	1800	CU			
12	045	3	10	SCT	30.00	88	76	5	1800	CU			
13	045	9	10	SCT	30.02	86	76	4	1800	CU	82	080	2
14	045	12	10	SCT	30.00	79	74	4	1800	CU	82	080	2
15	045	12	10	SCT	29.97	79	74	4	1800	CU	82	080	2
16	070	8	10	SCT	29.95	79	74	3	2400	CU	82	080	2
17	070	9	10	SCT	29.94	82	75	3	2400	CU	82	080	2
18	070	10	10	SCT	29.96	79	74	3	2400	CU	82	080	2
19	070	12	10	SCT	29.97	78	74	3	2400	CU	82	080	2
20	070	13	10	SCT	30.00	78	74	2	2400	CU	82	080	2
21	070	10	10	SCT	30.02	78	74	2	2400	CU	82	080	2
22	070	16	10	SCT	30.02	78	74	2	2400	CU	82	080	2
23	070	13	10	SCT	30.01	77	74	3	2400	CU	82	080	2
24	070	18	10	SCT	30.00	78	75	3	2400	CU	82	080	2

POSITION	ZONE	TIME
0800		
L _____	BY _____	
λ _____	BY _____	
1200		
L _____	BY _____	
λ _____	BY _____	
2000		
L <u>21-04N</u>	BY <u>3</u>	
λ <u>158-02W</u>	BY <u>3</u>	

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA	
FROM _____	(ZT) (Date)
TO _____	(ZT) (Date)
SET _____	
DRIFT _____	
POSITION BETWEEN FIXES	
MID. L _____	
MID. λ _____	

MILES STEAMED 0000-2400
<u>100</u>

FUEL CONSUMED 0000-2400
<u>879</u>

## REMARKS

00-04 Moored port side to A-5 U.S. Naval Base, Pearl Harbor, Hawaii with standard mooring lines doubled. Receiving various services from the pier. Ship's present includes various units of U.S. Pacific Fleet, Pearl Harbor and United States 50th Air Force. Material Condition Yoke is set.

G. O. Smith, LTJG, USN

04-08 Moored as before

G. O. Smith, LTJG, USN

APPROVED:

U.S.N. COMMANDING

EXAMINED:

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98THUR 10 OCT, 1963  
(Day) (Date) (Month)

08-12 MOORED AS BEFORE. 0805 MUSTERED CREW AT QUARTERS. ABSENTEES: NONE. 1023 MADE DAILY INSPECTION OF MAGAZINES AND SMOKELESS POWDER SAMPLES. CONDITIONS NORMAL. MADE WEEKLY FWP TEST OF MAGAZINE SPRINKLING AND FLOODING SYSTEM. TEST SATISFACTORY. 1140 SET SPECIAL SEA AND ANCHOR DETAIL. 1150 UNDERWAY FROM BERTH A-5 IAW COMFLETRAGRU PEARL OP-ORD 41-63 FOR LOCAL OP-AREA 6-2 WITH TARGET SLED IN TOW. COMMENCED STEERING VARIOUS COURSES AT VARIOUS SPEEDS IAW PEARL HARBOR CHANNEL. 1159 TARGET SLED STREAMED TO 400 FEET.

*R.M. Marker, Ensign, USNR*

12-16 Steaming as before. 1215 Buys 1 and 2 abeam. 1216 Secured Special Sea and Anchor Detail. 1226 Entered International Waters. Steaming on CS 205, sp 8KT. 1229 streamed sled to 1500 ft. 1249 1/2 to 12KT, 1415 1/2 to 6KT, 1435 1/2 to 245. 1453 1/2 to 4KT. 1459 1/2 to 6KT.

*D. H. H. LTJG, USN*

16-20 STEAMING AS BEFORE. 1627 COMMENCED SERVICES FOR EXERCISE Z-23-G FOR U.S.S. SPROSTON (DD577). 1647 SECURED FROM EXERCISE. 1655 C/C TO 060. 1801 C/S TO 4.0 KTS. HEAVING IN ON SLED TO 1400'. 1824 C/S TO 8.0 KTS.

*E. C. B. LTJG, USNR*

20-24 STEAMING AS BEFORE. 2036 C/C TO 090. 2106 C/C TO 270. 2156 C/C TO 090. 2247 C/C TO 270. 2335 C/C TO 090. 2341 C/C TO 070. 2345 C/C TO 090.

*R.M. Marker, Ensign, USNR*

APPROVED:

*U.S.N. COMMANDING*

EXAMINED:

*U.S.N. NAVIGATOR*



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION 410W DATE FRI 11 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM LOCAL OP. AREAS TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI-BIL-ITY (Miles)	WEATH-ER (Sym-bols)	BAROM-ETER (Inches)	TEMPER-ATURE		CLOUDS			SEA WATER TEMPER-ATURE	WAVES	
	DIREC-TION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC-TION (True)	HEIGHT (Feet)
01	070	18	10	SCT	30.00	78	75	3	2000	CU	82	090	3
02	070	14	10	SCT	29.99	78	75	3	2000	CU	82	090	3
03	070	14	10	SCT	29.99	78	75	3	2000	CU	82	090	3
04	070	14	10	SCT	29.99	78	75	3	2000	CU	82	090	3
05	070	14	10	SCT	29.99	78	75	4	2000	CU	82	090	3
06	080	13	10	SCT	30.02	77	72	4	2000	CU	82	090	3
07	080	13	10	SCT	30.02	77	74	4	2000	CU	82	090	3
08	085	5	10	SCT	30.02	81	73	4	2000	CU	82	090	3
09	085	5	10	SCT	30.04	80	74	4	2000	CU	82	090	3
10	085	7	10	SCT	30.04	82	75	4	2000	CU	82	090	3
11	085	6	10	SCT	30.03	83	76	4	2000	CU	82	090	3
12	085	13	10	SCT	30.04	81	75	4	2000	CU	82	090	3
13	085	13	10	SCT	30.03	82	75	3	2000	CU	82	090	3
14	085	12	10	SCT	30.00	83	76	4	2000	CU	82	090	3
15	040	11	10	SCT	30.00	84	77	5	2000	CU	82	090	2
16	040	4	10	SCT	29.97	86	76	3	2000	CU			
17	040	4	10	SCT	29.97	86	76	3	2000	CU			
18	040	4	10	SCT	30.00	86	76	3	2000	CU			
19	040	4	10	SCT	30.00	85	75	3	2000	CU			
20	040	3	10	SCT	30.01	83	71	3	2000	CU			
21	040	4	10	SCT	30.02	83	71	1	2000	CU			
22	040	3	10	SCT	30.02	82	70	1	2000	CU			
23	040	3	10	SCT	30.01	82	70	1	2000	CU			
24	040	3	10	SCT	30.01	82	70	1	2000	CU			

POSITION ZONE TIME

0800  
L 20-57N BY 3  
λ 158-13W BY 3

1200  
L 20-57N BY 3  
λ 158-15W BY 3

2000  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA

FROM \_\_\_\_\_ (ZT) (Date)  
TO \_\_\_\_\_ (ZT) (Date)

SET \_\_\_\_\_  
DRIFT \_\_\_\_\_

POSITION BETWEEN FIXES

MID. L 20-57 N  
MID. λ 158-14 W

MILES STEAMED  
0000-2400

130

FUEL CONSUMED  
0000-2400

1240

## REMARKS

ΦΦ-Φ4 Steaming independently off the South Coast of Okinawa, Hawaii in accordance with COMFLETRAGRU PEARL OP ORDER 41-63. on US ΦΦΦ, sp 8KT. with S-4Φ target sled No. 590 in tow astern on 14ΦΦ ft of wire. Nos 1 and 3 main generators and no 1 auxiliary generator are on the line. ΦΦ41 ¼ c to 27Φ. ΦΦ44 ¼ c to 27Φ. Φ137 ¼ c to Φ9Φ. Φ245 ¼ c to 28Φ. Φ325 ¼ c to 27Φ. Φ345 ¼ c to Φ9Φ. Φ359 ¼ c to 6KT.

*[Signature]* LTJG, USN

Φ4-Φ8 STEAMING AS BEFORE. Φ427 ¼ c to 285°. Φ442 ¼ c to 300°. Φ459 ¼ c to 208. Φ600 ¼ c to 230°. Φ645 ¼ c to Φ90°. Φ703 MADE DAILY INSPECTION OF MAGAZINES AND SMOKELESS POWDER SAMPLES. CONDITIONS NORMAL. Φ705 STREAM SLED TO 4500'. Φ709 ¼ c to 230. Φ748 ¼ c to 27Φ.

APPROVED:

*[Signature]*

U.S.N. COMMANDING

EXAMINED:

*[Signature]*

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98FRI 11 OCT 1963  
(Day) (Date) (Month)

08-12 STEAMING AS BEFORE. 0806 MUSTERED CREW <sup>ON STATION</sup> ~~AT QUARTERS~~: *Rmm*  
 ABSENTEES: NONE. 0811 C/C TO 180. C/S TO 12.0 KTS. 0821 C/S  
 TO 8.0 KTS. 0826 C/S TO 12.0 KTS. COMMENCED EXERCISE Z-21-G  
 WITH U.S.S. RENSHAW (DD-499). 0916 COMPLETED EXERCISE  
 Z-21-G. 0924 COMMENCED EXERCISE Z-23-G WITH RENSHAW.  
 0943 COMPLETED EXERCISE Z-23-G. 0945 C/C TO 000°. 0950 COMMENCED *Rm*  
 EXERCISE Z-21-G WITH U.S.S. EPPERSON (DD-719). 1055 COMPLETED  
 EXERCISE Z-21-G. COMMENCED EXERCISE Z-23-G. 1108 C/C TO 180°.  
 1136 COMPLETED EXERCISE Z-23-G. 1159 COMMENCED EXERCISE Z-23-G  
 WITH U.S.S. RENSHAW (DD-499)

*Rmm* *Markes, Ensign, USNR*

12-16 Steaming as before. 1202 C/S to 8KT. 1204 Completed  
 exercise Z-22-G. 1205 C/C to 050, C/S to 12KT. 1325 C/C to  
 060. 1330 Commenced Commanding Officer's Zone Material  
 Inspection. 1353 C/C to 030. 1435 Secured from Commanding  
 Officer's Zone Material Inspection. 1507 C/S to 4KT.  
 1535 Heaved in tow to 1400 ft. C/S to 8KT. 1536 C/C  
 to 333. 1538 Set Special Sea and Anchor Detail.  
 1544 Entered Inland Waters, steaming at various  
 courses and speeds to conform with channel.  
 1554 Heaved in sled to 400 ft. 1559 Heaved in sled  
 close up astern.

*J. Whelan* LTJG, USA

16-20 Steaming as before. 1621 Moored port side to  
 berth A-5, U.S. Naval Base, Pearl Harbor, Hawaii with  
 standard mooring lines doubled. 1624 Secured  
 Special Sea and Anchor Detail.

*J. Whelan* LTJG, USA

20-24 Moored as before

*J. Whelan* LTJG, USA

APPROVED:

*Carl Olson*

U.S.N. COMMANDING

EXAMINED:

*A. H. Racette*

U.S.N. NAVIGATOR



## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION +10W DATE SAT 12 OCT, 19 63  
 (Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI-BIL-ITY (Miles)	WEATH-ER (Sym-bols)	BAROM-ETER (Inches)	TEMPER-ATURE		CLOUDS			SEA WATER TEMPER-ATURE	WAVES	
	DIREC-TION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC-TION (True)	HEIGHT (Feet)
01	030	4	10	SCT	30.02	82	70	3	1800	CU			
02	030	4	10	SCT	30.00	82	69	5	1800	CU			
03	030	4	10	SCT	30.00	81	68	5	1800	CU			
04	030	4	10	SCT	29.98	77	75	5	1800	CU			
05	030	4	10	SCT	29.98	77	75	5	1800	CU			
06	030	3	10	SCT	29.98	72	71	3	1800	CU			
07	030	2	10	SCT	30.00	74	73	3	1800	CU			
08	030	2	10	SCT	30.00	74	73	3	1800	CU			
09	030	2	10	SCT	30.03	81	71	3	1800	CU			
10	050	2	10	SCT	30.03	81	71	4	1800	CU			
11	050	2	10	SCT	30.03	96	78	4	1800	CU			
12	050	4	10	SCT	30.04	96	78	4	1800	CU			
13	050	4	10	SCT	30.02	96	79	4	1800	CU			
14	050	4	10	SCT	30.00	95	79	4	1800	CU			
15	050	3	10	SCT	29.97	94	78	4	1800	CU			
16	050	5	10	SCT	29.98	91	76	4	1800	CU			
17	050	5	10	SCT	29.98	89	75	4	1800	CU			
18	070	7	10	SCT	30.00	82	75	3	1800	CU			
19	070	7	10	SCT	30.02	80	75	3	1800	CU			
20	070	7	10	SCT	30.02	80	75	3	1800	CU			
21	070	7	10	SCT	30.02	80	75	3	1800	CU			
22	070	4	10	SCT	30.02	80	75	5	1800	CU			
23	070	4	10	SCT	30.00	80	75	5	1800	CU			
24	070	4	10	SCT	30.00	80	75	4	1800	CU			

POSITION	ZONE	TIME
0800		
L	BY	
λ	BY	
1200		
L	BY	
λ	BY	
2000		
L	BY	
λ	BY	

LEGEND: 1 - CELESTIAL  
 2 - ELECTRONIC  
 3 - VISUAL  
 4 - D. R.

CURRENT DATA	
FROM	(Date)
TO	(Date)
SET	
DRIFT	
POSITION BETWEEN FIXES	
MID. L	
MID. λ	

MILES STEAMED 0000-2400
0

FUEL CONSUMED 0000-2400
378

## REMARKS

φφ-φ4 Moored port side to berth A-5, U.S. Naval Base, Pearl Harbor, Hawaii with standard mooring lines doubled. Receiving miscellaneous services from the pier. Ships present include various units of the U.S. Pacific Fleet, yard and district craft, SOPA is CINCPACFLT. Material Condition Yoke is set.

*D. M. White* LTJG, USN

φ4-φ8 Moored as before.

APPROVED:

*[Signature]*

U.S.N. COMMANDING

EXAMINED:

*D. M. White* LTJG, USN  
*A. J. Lantier*

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-88SIAT 12 OCT 1963  
(Day) (Date) (Month)

08-12 Moored as before. 0805 Mustered the crew on stations. Abundant? none. 0820 Made daily inspection of magazines and smokeless powder samples. Conditions normal.

A. H. Lantto Ch Bosn USN

12-16 Moored as before.

A. H. Lantto Ch Bosn USN

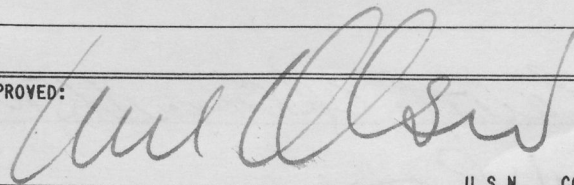
16-20 Moored as before.

A. H. Lantto Ch Bosn USN

20-24 Moored as before.

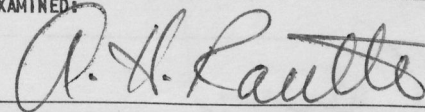
A. H. Lantto Ch Bosn USN

APPROVED:



U.S.N. COMMANDING

EXAMINED:



U.S.N. NAVIGATOR



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION +10W DATE SUN 13 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI- BIL- ITY (Miles)	WEATH- ER (Sym- bols)	BAROM- ETER (Inches)	TEMPER- ATURE		CLOUDS			SEA WATER TEMPER- ATURE	WAVES	
	DIREC- TION (True)	SPEED (knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC- TION (True)	HEIGHT (Feet)
01	055	2	10	SCT	29.99	80	75	4	1800	CU			
02	060	2	10	SCT	29.97	80	75	4	1800	CU			
03	060	2	10	SCT	29.97	80	75	4	1800	CU			
04	060	3	10	SCT	29.98	80	75	4	1800	CU			
05	060	4	10	SCT	29.98	75	72	4	1800	CU			
06	060	4	10	SCT	29.97	75	71	4	1800	CU			
07	060	3	10	SCT	29.97	75	71	5	1800	CU			
08	060	2	10	BKN	29.99	80	75	8	1800	CU			
09	066	3	10	BKN	29.99	80	75	7	1800	CU			
10	060	5	10	BKN	30.00	80	75	7	1800	CU			
11	060	6	10	SCT	29.98	85	72	5	1800	CU			
12	060	6	10	SCT	29.96	85	72	5	1800	CU			
13	060	6	10	SCT	29.94	86	72	5	1800	CU			
14	060	6	10	SCT	29.92	86	72	5	1800	CU			
15	060	6	10	SCT	29.90	86	75	5	1800	CU			
16	060	7	10	SCT	29.88	85	74	5	1800	CU			
17	060	7	10	R	29.89	84	74	7	1800	CU			
18	060	7	10	BKN	29.91	84	74	9	1800	CU			
19	060	7	10	BKN	29.92	83	72	8	1800	CU			
20	060	5	10	BKN	29.93	82	73	8	1800	CU			
21	060	4	10	SCT	29.96	81	73	5	1800	CU			
22	060	4	10	SCT	29.96	80	73	5	1800	CU			
23	060	4	10	SCT	29.98	80	73	5	1800	CU			
24	060	4	10	SCT	29.98	80	73	5	1800	CU			

POSITION ZONE TIME

0800  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

1200  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

2000  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA

FROM \_\_\_\_\_ (ZT) (Date)  
TO \_\_\_\_\_ (ZT) (Date)

SET \_\_\_\_\_  
DRIFT \_\_\_\_\_

POSITION BETWEEN FIXES

MID. L \_\_\_\_\_  
MID. λ \_\_\_\_\_

MILES STEAMED  
0000-2400  
3

FUEL CONSUMED  
0000-2400  
336

## REMARKS

00-04 Moored port side to berth A5, U.S. Naval Base Pearl Harbor, Hawaii with standard mooring lines doubled. Receiving miscellaneous services from the pier. Material condition code is set. Ships present include various units of the U.S. Pacific Fleet and District Craft. SOPA is CINCPACFLT. 0100 Set the special sea detail. 0140 Underway to shift berths in accordance to with COMNAVBASE PEARL Harbor orders. Commenced maneuvering on various courses and speeds to conform to the channel. 0205 Moored starboard side to U.S.S. DIACHENKO (APD-123) at berth B-23½, U.S. Naval Base, Pearl Harbor, Hawaii with standard mooring lines doubled. 0216 Secured the special sea detail.

04-08 Moored as before.

APPROVED:

U.S.N. COMMANDING

EXAMINED:

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98SUN 13 OCT, 1953  
(Day) (Date) (Month)

08-12 MOORED AS BEFORE. 0805 MUSTERED  
CREW ON STATION. ABSENTEES: NONE. 1105 MADE  
DAILY INSPECTION OF MAGAZINES AND SMOKELESS  
POWDER SAMPLES. CONDITIONS NORMAL.

E. C. Bach LTJG. USNR.

12-16 MOORED AS BEFORE.

E. C. Bach LTJG. USNR.

16-20 MOORED AS BEFORE.

E. C. Bach LTJG. USNR.

20-24 MOORED AS BEFORE.

E. C. Bach LTJG. USNR.

APPROVED:

W. H. Alston

U.S.N. COMMANDING

EXAMINED:

A. H. Riethe

U.S.N. NAVIGATOR



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION T10W DATE MON 14 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI- BIL- ITY (Miles)	WEATH- ER (Sym- bols)	BAROM- ETER (Inches)	TEMPER- ATURE		CLOUDS			SEA WATER TEMPER- ATURE	WAVES	
	DIREC- TION (True)	SPEED (knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC- TION (True)	HEIGHT (Feet)
01	060	4	10	R	29.96	79	73	5	1800	CU			
02	060	4	10	R	29.94	79	73	5	1800	CU			
03	060	4	10	R	29.94	79	73	5	1800	CU			
04	060	4	10	R	29.91	79	73	5	1800	CU			
05	060	5	10	SCT	29.92	79	73	5	1800	CU			
06	060	4	10	SCT	29.93	79	73	5	1800	CU			
07	060	4	10	BKN	29.95	79	73	6	1800	CU			
08	070	6	10	SCT	29.97	86	75	4	1800	CU			
09	070	4	10	SCT	30.00	91	75	3	1800	CU			
10	070	4	10	SCT	30.00	93	75	4	1800	CU			
11	070	3	10	BKN	30.00	95	76	6	1800	CU			
12	070	3	10	SCT	29.98	94	76	4	1800	CU			
13	030	3	10	SCT	29.96	94	76	3	1800	CU			
14	030	4	10	SCT	29.94	93	76	3	1800	CU			
15	030	3	10	SCT	29.92	93	76	3	1800	CU			
16	030	4	10	SCT	29.90	86	75	3	1800	CU			
17	030	3	10	SCT	29.92	87	76	3	1800	CU			
18	030	3	10	SCT	29.94	86	75	5	1800	CU			
19	030	3	10	BKN	29.94	84	75	6	1800	CU			
20	030	3	10	BKN	29.96	84	75	6	1800	CU			
21	030	4	10	SCT	29.98	83	74	4	1800	CU			
22	030	4	10	SCT	29.98	83	74	3	1800	CU			
23	030	6	10	SCT	29.97	82	74	2	1800	CU			
24	030	3	10	SCT	29.97	81	74	1	1800	CU			

POSITION ZONE TIME

0800  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

1200  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

2000  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA

FROM \_\_\_\_\_ (ZT) (Date)  
TO \_\_\_\_\_ (ZT) (Date)

SET \_\_\_\_\_  
DRIFT \_\_\_\_\_

POSITION BETWEEN FIXES

MID. L \_\_\_\_\_  
MID. λ \_\_\_\_\_

MILES STEAMED  
0000-2400

3

FUEL CONSUMED  
0000-2400

925

## REMARKS

00-04 MOORED STBD SIDE TO U.S.S. DIACHENKO (APD 123) AT BERTH B23.5, U.S. NAVAL BASE, PEARL HARBOR, HAWAII WITH STANDARD MOORING LINES DOUBLED. RECEIVING MISCELLANEOUS SERVICES FROM THE PIER. SHIPS PRESENT INCLUDE VARIOUS UNITS OF THE U.S. PACIFIC FLEET, YARD AND DISTRICT CRAFT. MATERIAL CONDITION YOKE IS SET THROUGHOUT THE SHIP. SOPA IS CINGPACFLT.

04-08 MOORED AS BEFORE. 0700 MUSTERED CREW ON STATION. ABSENTEES: NONE. 0730 SET SPECIAL SEA AND ANCHOR DETAIL. 0733 MADE DAILY INSPECTION OF MAGAZINES AND SMOKELESS POWDER SAMPLES. CONDITIONS NORMAL. 0746 UNDERWAY FROM ALONGSIDE U.S.S. DIACHENKO (APD 123) IAW VERBAL ORDERS COMNAVBASE PEARL MANEUVERING

APPROVED:

U.S.N. COMMANDING

EXAMINED:

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-88MON 14 OCT 63  
(Day) (Date) (Month)04-08 (CON) ON VARIOUS COURSES AND SPEEDS  
TO CLEAR BERTH AND CONFORM TO THE CHANNEL.E. J. Bach LTJG. USNR.

08-12 <sup>Steaming</sup> ~~Undertow~~ as before 0810 Moored port side to <sup>bow</sup>  
 A-5 U.S. Naval Base Pearl Harbor, Hawaii  
 with standard mooring lines doubled 0817  
 secured special sea and anchor detail. 0835  
 The Commanding Officer held court and imposed non-  
 judicial punishment on JELANE REVIERE, L.S.  
683 5786 SA USN. OFFENSE ART. 86 AND ART. 87 AWOL  
and MISSING MOVEMENT. & PUNISHMENT. - 14 DAYS <sup>for</sup>  
RESTRICTION TO THE SHIP.

B. D. Ennals LTJG USN12-16 Moored as beforeB. D. Ennals LTJG USN.16-20 Moored as beforeB. D. Ennals LTJG USN.20-24 Moored as beforeB. D. Ennals LTJG USN.

APPROVED:

Carl Olsen

U.S.N. COMMANDING

EXAMINED:

A. H. Pacht

U.S.N. NAVIGATOR



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION ±10W DATE TUE 15 OCT, 19 63  
(Day) (Date) (Month)AT/PASSAGE FROM PEARL HARBOR, HAWAII TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISIBILITY (Miles)	WEATHER (Symbols)	BAROMETER (Inches)	TEMPERATURE		CLOUDS			SEA WATER TEMPERATURE	WAVES	
	DIRECTION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIRECTION (True)	HEIGHT (Feet)
01	040	2	5	R	29.96	81	79	10	1800	CU			
02	030	3	5	H	29.95	82	79	9	1800	CU			
03	030	4	3	H	29.92	81	79	8	1800	CU			
04	030	4	3	H	29.92	77	74	8	1800	CU			
05	030	3	3	H	29.92	76	74	8	1800	CU			
06	030	3	3	H	29.94	77	75	7	1800	CU			
07	040	3	10	SCT	29.96	78	75	4	1800	CU			
08	040	3	10	SCT	29.98	79	78	4	1800	CU			
09	040	3	10	SCT	30.00	82	79	3	1800	CU			
10	040	4	10	SCT	30.02	87	76	5	1800	CU			
11	040	4	10	SCT	30.02	88	77	5	1800	CU			
12	030	4	10	SCT	30.00	92	78	5	1800	CU			
13	030	3	10	SCT	29.98	92	78	5	1800	CU			
14	030	3	10	SCT	29.98	91	78	5	1800	CU			
15	030	3	10	SCT	29.96	90	76	4	1800	CU			
16	030	3	10	SCT	29.94	91	77	4	1800	CU			
17	030	3	10	SCT	29.94	90	75	3	1800	CU			
18	030	3	10	SCT	29.96	92	70	3	1800	CU			
19	030	3	10	SCT	29.98	86	70	3	1800	CU			
20	030	3	10	SCT	30.00	85	69	3	1800	CU			
21	030	2	10	SCT	30.00	84	69	3	1800	CU			
22	040	2	10	SCT	30.00	81	69	3	1800	CU			
23	040	2	10	SCT	30.00	80	68	3	1800	CU			
24	040	2	10	SCT	30.00	80	68	3	1800	CU			

POSITION	ZONE	TIME
0800		
L _____	BY _____	
λ _____	BY _____	
1200		
L _____	BY _____	
λ _____	BY _____	
2000		
L _____	BY _____	
λ _____	BY _____	

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA	
FROM _____	(ZT) (Date)
TO _____	(ZT) (Date)
SET _____	
DRIFT _____	
POSITION BETWEEN FIXES	
MID. L _____	
MID. λ _____	

MILES STEAMED  
0000-2400

FUEL CONSUMED  
0000-2400

336

## REMARKS

00-04 Moored port side to A-5 U.S. Naval Base, Pearl Harbor, Hawaii with standard mooring line doubled. Receiving various services from the pier. Ships present include various units of U.S. Pacific Fleet, Yard Harbor, and District Capt. SOPA is CINCPACFLT. Material Condition 3rd is set.

S.D. Smith CDR USN

0408 Moored as before 0705 Mustered the crew at 800 quarters. Absentee from 0740 Made daily inspection of magazines and smokeless powder samples. Condition Normal.

S.D. Smith CDR USN

APPROVED:

*[Signature]*

U.S.N. COMMANDING

EXAMINED:

*[Signature]*

U.S.N. NAVIGATOR



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-88

TUE 15 OCT, 1963  
(Day) (Date) (Month)

08-12 MOORED AS BEFORE.

*B. M. Markke*  
Ensign, USNR

12-16 MOORED AS BEFORE.

*B. M. Markke*  
Ensign, USNR

16-20 MOORED AS BEFORE

*B. M. Markke*  
Ensign, USNR

20-24 MOORED AS BEFORE

*B. M. Markke*  
Ensign, USNR

APPROVED:

*Paul Olsen*

U.S.N. COMMANDING

EXAMINED:

*A. H. Rautio*

U.S.N. NAVIGATOR

TO BE FORWARDED TO THE BUREAU OF NAVAL PERSONNEL AT THE END OF EACH MONTH



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION TIOW DATE WED 16 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI- BIL- ITY (Miles)	WEATH- ER (Sym- bols)	BAROM- ETER (Inches)	TEMPER- ATURE		CLOUDS			SEA WATER TEMPER- ATURE	WAVES	
	DIREC- TION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC- TION (True)	HEIGHT (Feet)
01	040	2	10	SCT	29.98	80	68	3	1800	CU			
02	040	2	10	SCT	29.98	80	68	3	1800	CU			
03	040	2	10	SCT	29.96	80	68	3	1800	CU			
04	040	2	10	SCT	29.94	81	68	3	1800	CU			
05	040	2	10	SCT	29.92	81	68	3	1800	CU			
06	040	2	10	SCT	29.95	81	68	3	1800	CU			
07	040	2	10	SCT	29.97	84	74	2	1800	CU			
08	040	2	10	SCT	29.99	85	74	2	1800	CU			
09	040	2	10	SCT	30.01	90	76	2	1800	CU			
10	040	2	10	SCT	30.01	85	74	2	1800	CU			
11	040	2	10	SCT	30.00	86	75	5	1800	CU			
12	040	2	10	SCT	29.98	88	76	5	1800	CU			
13	040	2	10	SCT	29.96	88	76	5	1800	CU			
14	040	2	10	SCT	29.94	88	76	5	1800	CU			
15	040	2	10	SCT	29.92	87	75	5	1800	CU			
16	040	2	10	SCT	29.92	88	76	5	1800	CU			
17	040	2	10	SCT	29.92	91	78	5	1800	CU			
18	040	2	10	SCT	29.92	90	78	5	1800	CU			
19	040	2	10	SCT	29.94	88	74	5	1800	CU			
20	040	2	10	SCT	29.95	84	74	2	1800	CU			
21	040	2	10	SCT	29.95	84	74	2	1800	CU			
22	040	2	10	SCT	29.95	84	74	2	1800	CU			
23	040	2	10	SCT	29.96	78	74	2	1800	CU			
24	040	2	10	SCT	29.94	78	74	2	1800	CU			

POSITION ZONE TIME

0800  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

1200  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

2000  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA

FROM \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)  
TO \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)

SET \_\_\_\_\_  
DRIFT \_\_\_\_\_

POSITION BETWEEN FIXES

MID. L \_\_\_\_\_  
MID. λ \_\_\_\_\_

MILES STEAMED  
0000-2400  
0

FUEL CONSUMED  
0000-2400  
253

## REMARKS

00-04 MOORED PORT SIDE TO BERTH A-5 U.S. NAVAL BASE PEARL HARBOR, HAWAII WITH STANDARD MOORING LINES DOUBLED. RECEIVING MISCELLANEOUS SERVICES FROM THE PIER. SHIPS PRESENT INCLUDE VARIOUS UNITS OF THE U.S. PACIFIC FLEET, YARD AND DISTRICT CRAFT. SOPA IS CINCPACFLT WITH OFFICES ASHORE. MATERIAL CONDITION YOKE IS SET THROUGHOUT THE SHIP.

R. M. Markie  
Ensign, USNR

04-08 MOORED AS BEFORE. 0705 MUSTERED CREW AT QUARTERS. ABSENTEES: NONE. 0742 MADE DAILY INSPECTION OF MAGAZINES AND SMOKELESS POWDER SAMPLES. CONDITIONS NORMAL.

R. M. Markie  
Ensign, USNR

APPROVED:

U.S.N. COMMANDING

EXAMINED:

A. H. Racette U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98WED 16 OCT 63  
(Day) (Date) (Month)

08-12 Moored as before. 0930 The Commanding Officer held mast and imposed non-judicial punishment as follows: ROSS, L.O., 5404945, YN3, USN. OFFENSE: Disobedience of a lawful order. PUNISHMENT: Reduction in rate to YNSN and confinement on bread and water for three (3) days commencing 16 October 1963. 1050 Pursuant to the orders of the Commanding Officer, ROSS, L.O., 5404945, YNSN, USN departed ship to be placed in confinement on bread and water for three (3) days at the U.S. Naval Station, Pearl Harbor Brig in execution of non-judicial punishment assigned him at mast this date.

*J. J. Whinn* LTJG, USN

12-16 Moored as before.

*J. J. Whinn* LTJG, USN

16-20 Moored as before.

*J. J. Whinn* LTJG, USN

20-24 Moored as before.

*J. J. Whinn* LTJG, USN

APPROVED:

*[Signature]*

U.S.N. COMMANDING

EXAMINED:

*A. J. Racette*

U.S.N. NAVIGATOR

TO BE FORWARDED TO THE BUREAU OF NAVAL PERSONNEL AT THE END OF EACH MONTH



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION +10W DATE THUR 17 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI-BIL-ITY (Miles)	WEATH-ER (Sym-bols)	BAROM-ETER (Inches)	TEMPER-ATURE		CLOUDS			SEA WATER TEMPER-ATURE	WAVES	
	DIREC-TION (True)	SPEED (knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC-TION (True)	HEIGHT (Feet)
01	040	1	10	SCT	29.93	78	74	3	1800	CU			
02	040	1	10	SCT	29.93	78	74	3	1800	CU			
03	040	1	10	SCT	29.92	78	74	3	1800	CU			
04	020	2	10	SCT	29.90	75	73	3	1800	CU			
05	020	2	10	SCT	29.91	75	73	3	1800	CU			
06	020	2	10	SCT	29.91	76	73	3	1800	CU			
07	020	2	10	SCT	29.92	75	73	4	1800	CU			
08	020	2	10	SCT	29.94	76	73	4	1800	CU			
09	020	3	10	SCT	29.95	84	76	3	1800	CU			
10	020	3	10	SCT	29.96	87	78	5	1800	CU			
11	020	3	10	SCT	29.96	90	84	5	1800	CU			
12	020	4	10	SCT	29.94	89	80	5	1800	CU			
13	020	3	10	SCT	29.92	88	80	5	1800	CU			
14	020	4	10	SCT	29.90	86	79	4	1800	CU			
15	020	3	10	SCT	29.88	84	76	5	1800	CU			
16	020	2	10	SCT	29.88	88	80	4	1800	CU			
17	020	2	10	SCT	29.89	89	79	3	1800	CU			
18	-	0	10	SCT	29.90	83	75	2	1800	CU			
19	-	0	10	SCT	29.92	81	74	2	1800	CU			
20	-	0	10	SCT	29.92	80	74	2	1800	CU			
21	-	0	10	SCT	29.92	81	73	2	1800	CU			
22	-	0	10	SCT	29.94	81	73	2	1800	CU			
23	-	0	10	SCT	29.94	81	73	3	1800	CU			
24	-	0	10	SCT	29.92	82	73	5	1800	CU			

POSITION ZONE TIME

0800  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

1200  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

2000  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA

FROM \_\_\_\_\_ (ZT) (Date)  
TO \_\_\_\_\_ (ZT) (Date)

SET \_\_\_\_\_  
DRIFT \_\_\_\_\_

POSITION BETWEEN FIXES

MID. L \_\_\_\_\_  
MID. λ \_\_\_\_\_

MILES STEAMED  
0000-2400  
①

FUEL CONSUMED  
0000-2400  
399

## REMARKS

ΦΦ-Φ4 Moored port side to berth A-5, U.S. Naval Base, Pearl Harbor, Hawaii with standard mooring lines doubled. Receiving miscellaneous services from the pier. Ships present include various units of the U.S. Pacific Fleet, Yard and District Craft. Material Condition Yoke is set. SOPA is CINCPACFLT. ~~Φ7Φ5~~ AM  
~~Moored the crew~~

JJ McWhin LTJG, USN

Φ4-Φ8 Moored as before. Φ7Φ5 Mustered the crew at quarters. Absentees, none.

APPROVED:

U.S.N. COMMANDING

EXAMINED:

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-88THUR 17 OCT, 1963  
(Day) (Date) (Month)

08-12 Moored as before. 0925 YOGN-115 moored alongside to stbd. 0940 Made daily inspection of magazines and smokeless powder samples. Conditions normal. Made weekly test of magazine sprinkling system. Test satisfactory. 0947 Commenced fueling from YOGN-115. Draft fwd 13'00", aft. 16'8". 1100 Fueling completed having received 16,507 gal. diesel. Draft fwd 13'3", aft. 16'10". 1141 YOGN-115 underway from alongside to stbd. in tow of YTM-496.

A. H. Racette Ch Bosn USN

12-16 Moored as before.

A. H. Racette Ch Bosn USN

16-20 Moored as before.

A. H. Racette Ch Bosn USN

20-24 Moored as before.

A. H. Racette Ch Bosn USN

APPROVED:

U.S.N. COMMANDING

EXAMINED:

U.S.N. NAVIGATOR



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION HIOW DATE FRI 18 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR HAWAII TO

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISIBILITY (Miles)	WEATHER (Symbols)	BAROMETER (Inches)	TEMPERATURE		CLOUDS			SEA WATER TEMPERATURE	WAVES	
	DIRECTION (True)	SPEED (knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIRECTION (True)	HEIGHT (Feet)
01	—	0	10	SCT	29.91	81	76	4	2000	CU			
02	—	0	10	SCT	29.91	80	76	4	2000	CU			
03	—	0	10	SCT	29.90	78	73	5	2000	CU			
04	—	0	10	SCT	29.91	78	73	5	2000	CU			
05	—	0	10	SCT	29.91	78	73	5	2000	CU			
06	—	0	10	BKN	29.93	79	74	8	2000	CU			
07	—	0	10	BKN	29.94	80	75	8	2000	CU			
08	—	0	10	BKN	29.96	87	75	8	2000	CU			
09	050	4	10	BKN	29.97	89	75	7	2000	CU			
10	050	5	10	BKN	29.98	92	84	7	2000	CU			
11	050	5	10	BKN	29.98	89	76	7	2000	CU			
12	050	7	10	BKN	29.96	89	76	6	2000	CU			
13	050	7	10	BKN	29.92	88	76	7	2000	CU			
14	050	7	10	BKN	29.92	88	76	6	2000	CU			
15	050	5	10	BKN	29.90	88	75	7	2000	CU			
16	050	5	10	BKN	29.92	86	75	6	2000	CU			
17	050	5	10	BKN	29.92	80	72	6	2000	CU			
18	050	5	10	BKN	29.94	80	71	6	2000	CU			
19	050	4	10	BKN	29.94	80	71	6	2000	CU			
20	050	4	10	BKN	29.94	79	71	6	2000	CU			
21	050	3	10	BKN	29.95	79	71	6	2000	CU			
22	050	2	10	BKN	29.95	79	71	6	2000	CU			
23	—	0	10	BKN	29.96	79	71	6	2000	CU			
24	—	0	10	BKN	29.94	79	71	6	2000	CU			

POSITION ZONE TIME

0800  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

1200  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

2000  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA

FROM \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)  
TO \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)

SET \_\_\_\_\_  
DRIFT \_\_\_\_\_

POSITION BETWEEN FIXES

MID. L \_\_\_\_\_  
MID. λ \_\_\_\_\_

MILES STEAMED  
0000-2400  
○

FUEL CONSUMED  
0000-2400  
273

## REMARKS

00-04 Moored port side to berth A-5 U.S. Naval Base, Pearl Harbor Hawaii with standard mooring lines doubled. Receiving miscellaneous services from the pier. Material condition log is set. Ships present include various units of the U.S. Pacific Fleet, yard and District Craft. SOPA is CINCPACFLT.

A. H. Racette Lt Bosn USN

04-08 Moored as before. 0705 Mustered the crew at quarters. Absentees: none. 0745 Made daily inspection of magazines and smokeless powder samples. Conditions normal.

A. H. Racette Lt Bosn USN

APPROVED:

*[Signature]*

U.S.N. COMMANDING

EXAMINED:

*[Signature]*

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98FRI 18 OCT, 1963  
(Day) (Date) (Month)08-12 MOORED AS BEFORE.E. C. Bach Jr. LTJG. USNR.12-16 MOORED AS BEFORE. 1300 COMMENCED  
MATERIAL INSPECTION. 1345 SECURED INSPECTION.E. C. Bach Jr. LTJG. USNR.16-20 MOORED AS BEFORE. 2122 ROSS, L.O.  
5404945 YNSN USN RETURNED ON BOARD, WAS RELEASED  
FROM CONFINEMENT AND RESTORED TO DUTYE. C. Bach Jr. LTJG. USNR.20-24 MOORED AS BEFORE.E. C. Bach Jr. LTJG. USNR.

APPROVED:

Am. Olsen

U.S.N. COMMANDING

EXAMINED:

A. H. Racette

U.S.N. NAVIGATOR



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION T10W DATE SAT 19 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISIBILITY (Miles)	WEATHER (Symbols)	BAROMETER (Inches)	TEMPERATURE		CLOUDS			SEA WATER TEMPERATURE	WAVES	
	DIRECTION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIRECTION (True)	HEIGHT (Feet)
01	-	0	10	SCT	29.94	78	74	2	1800	CU			
02	-	0	10	SCT	29.92	79	74	2	1800	CU			
03	-	0	10	SCT	29.92	80	74	3	1800	CU			
04	-	0	10	SCT	29.94	81	74	3	1800	CU			
05	-	0	10	SCT	29.94	82	75	4	1800	CU			
06	-	0	10	SCT	29.96	83	75	4	1800	CU			
07	-	0	10	SCT	29.96	83	75	5	1800	CU			
08	000	2	10	SCT	29.98	84	76	5	1800	CU			
09	000	2	10	BKN	29.98	84	76	7	1800	CU			
10	000	3	10	BKN	30.00	86	76	9	1800	CU			
11	000	2	10	BKN	30.00	93	76	8	1800	CU			
12	040	2	10	BKN	29.98	94	77	8	1800	CU			
13	040	2	10	BKN	29.96	94	77	7	1800	CU			
14	040	2	10	BKN	29.93	92	76	7	1800	CU			
15	040	2	10	SCT	29.91	87	76	5	1800	CU			
16	040	5	10	SCT	29.91	90	76	5	1800	CU			
17	040	5	10	SCT	29.93	89	76	5	1800	CU			
18	040	5	10	SCT	29.94	86	75	4	1800	CU			
19	040	4	10	SCT	29.96	84	75	4	1800	CU			
20	040	4	10	SCT	29.96	83	75	3	1800	CU			
21	040	3	10	SCT	29.96	84	75	4	1800	CU			
22	-	0	10	SCT	29.96	84	76	4	1800	CU			
23	-	0	10	SCT	29.96	82	76	3	1800	CU			
24	-	0	10	SCT	29.97	81	76	3	1800	CU			

POSITION ZONE TIME

0800  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

1200  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

2000  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA

FROM \_\_\_\_\_ (ZT) (Date)  
TO \_\_\_\_\_ (ZT) (Date)

SET \_\_\_\_\_  
DRIFT \_\_\_\_\_

POSITION BETWEEN FIXES

MID. L \_\_\_\_\_  
MID. λ \_\_\_\_\_

MILES STEAMED  
0000-2400  
30

FUEL CONSUMED  
0000-2400  
294

## REMARKS

00-04 MOORED PORT SIDE TO BERTH A5, U.S. NAVAL BASE, PEARL HARBOR, HAWAII WITH STANDARD MOORING LINES DOUBLED, RECEIVING MISCELLANEOUS SERVICES FROM THE PIER. SHIP'S PRESENT INCLUDE VARIOUS UNITS OF THE U.S. PACIFIC FLEET, YARD AND HARBOR CRAFT. MATERIAL CONDITION YOKE IS SET THROUGHOUT THE SHIP. SOPA IS CINCPACFLT.

*E. C. Bach* LTJG. USNR.

04-08 MOORED AS BEFORE. 0730 MADE DAILY INSPECTION OF MAGAZINES AND SMOKELESS POWDER SAMPLES. CONDITIONS NORMAL. 0755 MUSTERED THE CREW ON STATION. ABSENTEES: NONE.

APPROVED:

*W. M. Olson*  
U.S.N. COMMANDING

EXAMINED:

*E. C. Bach* LTJG. USNR.  
*A. H. Rauter* U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP *ARIKARA ATF-98**SAT 19 OCT 63*  
(Day) (Date) (Month) 1963*08-12 Moved as before 0800 Mustered the  
duty section section Absentee: None* *SR**B.D. Ennik*  
LTJG USN.*12-16 Moved as before**B.D. Ennik*  
LTJG USN.*16-20 Moved as before**B.D. Ennik*  
LTJG USN.*20-24 Moved as before. 2045 Set special sea  
and anchoring detail. 2105 Underway from H-5 to  
B-22 1/2 in accordance with phone conversation  
with Duty Officer COMNAVBASE PEARL. 2105 Captain  
has the anchor manning at various courses and speeds  
to conform to harbor. 2131 Moved starboard side to  
B-22 1/2 out board USS. NEWELL (DER-322) Pearl  
Harbor, Hawaii using standard mooring lines hauled.  
2135 Secured special sea detail.**B.D. Ennik*  
LTJG USN.

APPROVED:

*Wm. Olsen*

U.S.N. COMMANDING

EXAMINED:

*A.H. Rautts*

U.S.N. NAVIGATOR

TO BE FORWARDED TO THE BUREAU OF NAVAL PERSONNEL AT THE END OF EACH MONTH



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION T10W DATE SUN 20 OCT, 19 63  
(Day) (Date) (Month)AT/PASSAGE FROM PEARL HARBOR, HAWAII TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI-BIL-ITY (Miles)	WEATH-ER (Sym-bols)	BAROM-ETER (Inches)	TEMPER-ATURE		CLOUDS			SEA WATER TEMPER-ATURE	WAVES	
	DIREC-TION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC-TION (True)	HEIGHT (Feet)
01	—	0	10	SCT	29.94	77	73	2	1800	CU			
02	—	0	10	SCT	29.93	81	74	2	1800	CU			
03	—	0	10	SCT	29.92	81	74	2	1800	CU			
04	—	0	10	SCT	29.92	81	74	5	1800	CU			
05	—	0	10	BKN	29.92	82	75	7	1800	CU			
06	—	0	10	BKN	29.94	82	75	8	1800	CU			
07	—	0	10	BKN	29.96	82	75	8	1800	CU			
08	070	3	10	OVC	29.98	81	74	10	1800	CU			
09	070	3	10	OVC	29.99	80	74	10	1800	CU			
10	070	3	10	OVC	30.00	80	75	10	1800	CU			
11	070	3	10	OVC	30.00	82	75	10	1800	CU			
12	070	3	10	OVC	29.98	82	75	10	1800	CU			
13	070	3	10	OVC	29.96	81	76	10	1800	CU			
14	070	3	10	OVC	29.94	83	77	10	1800	CU			
15	045	5	10	OVC	29.93	87	81	10	1800	CU			
16	045	4	10	OVC	29.94	87	79	10	1800	CU			
17	030	3	10	OVC	29.96	87	76	10	1800	CU			
18	040	3	10	OVC	29.96	83	76	10	1800	CU			
19	020	2	10	OVC	29.98	83	76	10	1800	CU			
20	020	2	10	OVC	29.99	82	75	10	1800	CU			
21	020	2	10	OVC	30.01	80	74	10	1800	CU			
22	020	2	10	OVC	30.02	79	74	10	1800	CU			
23	020	2	10	BKN	30.02	79	73	8	1800	CU			
24	020	2	10	BKN	30.00	75	73	8	1800	CU			

POSITION ZONE TIME  
0800  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_  
1200  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_  
2000  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_  
LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA  
FROM \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)  
TO \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)  
SET \_\_\_\_\_  
DRIFT \_\_\_\_\_  
POSITION BETWEEN FIXES  
MID. L \_\_\_\_\_  
MID. λ \_\_\_\_\_

MILES STEAMED  
0000-2400  
0

FUEL CONSUMED  
0000-2400  
378

## REMARKS

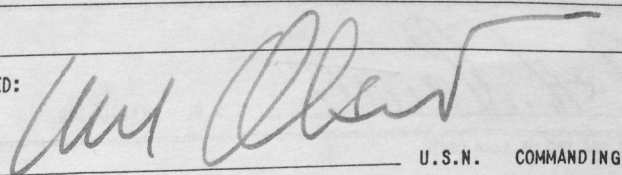
00-04 Moved starboard side to B-22 1/2 outbound  
USS Turret (Den 322) at U.S. Naval Base, Pearl  
Harbor, Hawaii with standard morning line doubled.  
Ship's present includes various units of the U.S. Pacific  
fleet, yard, harbor and district craft. Material condition  
Yoke is set. SOPA is CIRCULAR PLT. Receiving various  
services for the pier.

B.D. Frank, LTJG, USN.

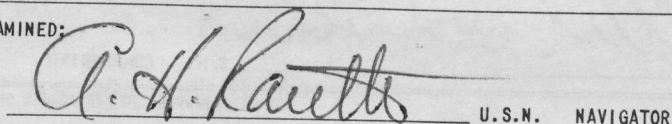
04-08 Moved as before.

B.D. Frank, LTJG, USN.

APPROVED:

  
U.S.N. COMMANDING

EXAMINED:

  
U.S.N. NAVIGATOR



FOR OFFICIAL USE ONLY

NAVPER 720 (Rev. 4-56)

ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98

SUN 20 OCT 63  
(Day) (Date) (Month) 1963

18-12 MOORED AS BEFORE. 0800 MUSTERED CREW ON STATION.  
ABSENTEES: NONE. 0830 MADE DAILY INSPECTION OF MAGAZINES  
AND SMOKELESS POWDER SAMPLES. CONDITIONS NORMAL.

R.M. Markes  
Ensign, USNR

12-16 MOORED AS BEFORE.

R.M. Markes  
Ensign, USNR

16-20 MOORED AS BEFORE.

R.M. Markes  
Ensign, USNR

20-24 MOORED AS BEFORE.

R.M. Markes  
Ensign, USNR

APPROVED:

[Signature]

U.S.N. COMMANDING

EXAMINED:

[Signature]

U.S.N. NAVIGATOR

TO BE FORWARDED TO THE BUREAU OF NAVAL PERSONNEL AT THE END OF EACH MONTH



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION TIOW DATE MON 21 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI-BIL-ITY (Miles)	WEATH-ER (Sym-bols)	BAROM-ETER (Inches)	TEMPER-ATURE		CLOUDS			SEA WATER TEMPER-ATURE	WAVES	
	DIREC-TION (True)	SPEED (knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC-TION (True)	HEIGHT (Feet)
01	020	2	10	BKN	30.00	75	75	7	1800	CU			
02	020	2	10	BKN	30.00	75	75	7	1800	CU			
03	020	2	10	BKN	30.00	76	74	7	1800	CU			
04	030	2	10	BKN	29.98	79	72	8	1800	CU			
05	030	1	10	BKN	29.97	80	74	9	1800	CU			
06	080	2	10	OVC	29.99	79	72	10	1800	CU			
07	080	2	10	OVC	30.02	79	72	10	1800	CU			
08	080	2	10	OVC	30.05	79	72	10	1800	CU			
09	090	6	10	BKN	30.08	80	74	8	1800	CU	82	080	3
10	100	9	10	BKN	30.08	80	77	8	1800	CU	82	080	3
11	100	10	10	BKN	30.08	80	77	8	1800	CU	82	080	3
12	100	10	10	BKN	30.06	82	77	7	1800	CU	82	080	3
13	100	10	10	BKN	30.06	82	77	7	1800	CU	82	080	3
14	100	8	10	BKN	30.06	84	76	6	1800	CU	82	080	3
15	100	8	10	SCT	30.04	84	76	4	2000	CU	82	080	3
16	060	4	10	SCT	30.04	85	75	4	2000	CU			
17	060	4	10	SCT	30.04	85	75	4	2000	CU			
18	045	2	10	SCT	30.03	85	75	4	2000	CU			
19	045	3	10	SCT	30.03	85	75	4	2000	CU			
20	045	3	10	SCT	30.02	84	75	4	2000	CU			
21	045	3	10	SCT	30.02	84	75	4	2000	CU			
22	045	2	10	SCT	30.02	84	75	5	2000	CU			
23	045	2	10	SCT	30.01	83	75	5	2000	CU			
24	045	2	10	SCT	30.01	84	75	5	2000	CU			

POSITION	ZONE	TIME
0800		
L _____	BY _____	
λ _____	BY _____	
1200		
L <u>21-02 N</u>	BY <u>3</u>	
λ <u>157-49.5 W</u>	BY <u>3</u>	
2000		
L _____	BY _____	
λ _____	BY _____	

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA	
FROM _____	(Date)
TO _____	(Date)
SET _____	
DRIFT _____	
POSITION BETWEEN FIXES	
MID. L _____	
MID. λ _____	

MILES STEAMED 0000-2400
<u>72</u>

FUEL CONSUMED 0000-2400
<u>406</u>

## REMARKS

04-04 MOORED STARBOARD SIDE TO U.S.S. NEWELL (DER-322) AT BERTH B-22.5, U.S. NAVAL BASE, PEARL HARBOR, HAWAII WITH STANDARD MOORING LINES DOUBLED. SHIPS PRESENT INCLUDE VARIOUS UNITS OF THE U.S. PACIFIC FLEET, YARD AND DISTRICT CRAFT RECEIVING MISCELLANEOUS SERVICES FROM THE PIER. SOPA IS CINCPACFLT WITH OFFICES ABOARD. MATERIAL CONDITION YOKE IS SET THROUGHOUT THE SHIP.

*B. M. Markie, Ensign, USNR*

04-08 MOORED AS BEFORE. 0705 MUSTERED CREW AT QUARTERS. ABSENTEES NONE. 0718 SET SPECIAL SEA AND ANCHOR DETAIL. 0735 UNDERWAY FROM ALONGSIDE U.S.S. NEWELL (DER-322) AT BERTH B-22.5 ENROUTE TO LOCAL OP-AREA I.A.W. COMFLETRACERU OP-SKED 43-63. 0736 COMMENCED STEERING VARIOUS COURSES AT VARIOUS SPEEDS CONFORMING TO PEARL HARBOR CHANNEL.

APPROVED:

*[Signature]*  
U.S.N. COMMANDING

EXAMINED:

*B. M. Markie, Ensign, USNR*  
*A. H. Racette*  
U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98MON 21 OCT 1963  
(Day) (Date) (Month)

Ø8-12 STEAMING AS BEFORE. Ø817 ENTERED INTERNATIONAL WATERS. SECURED FROM SPECIAL SEA AND ANCHOR DETAIL. Ø819 C/C TO 165 Ø822 C/S TO 13.5 KTS. Ø853 MADE DAILY INSPECTION OF MAGAZINES AND SMOKELESS POWDER SAMPLES. CONDITIONS NORMAL. 1001 C/C TO 135. 1025 C/C TO Ø8Ø C/S TO 4.Ø KTS. WENT TO GENERAL QUARTERS. 1034 MATERIAL CONDITION ZEBRA SET THROUGHOUT THE SHIP. COMMENCED EXERCISE Z-1-G. 1043 COMMENCED FIRE TO PORT. 1043 CEASED FIRE. 1103 SET MATERIAL CONDITION YOKE THROUGHOUT THE SHIP. SECURED FROM GENERAL QUARTERS. AMMUNITION EXPENDED: 2 ROUNDS 3"/5Ø VT NONFRAG. 1104 C/C TO 335 C/S TO 12.Ø KTS. 1125 COMMENCED STEERING EXERCISES, BASE COURSE 335°.

*E. J. Mack* LTJG, USNR.

12-16 STEAMING AS BEFORE. 1244 C/S TO 8.Ø KTS. 1303 WENT TO GENERAL QUARTERS. SET MATERIAL CONDITION ZEBRA. 1315 COMMENCED ENGINEERING EXERCISES. C/C TO Ø9Ø°. 1324 C/S TO 4.Ø KTS. 1352 C/C TO 27Ø°. 1433 C/C TO 34Ø°. 1513 SET MATERIAL CONDITION YOKE. 1515 SECURED FROM GENERAL QUARTERS. SECURED FROM ENGINEERING DRILLS. SET SPECIAL SEA AND ANCHOR DETAIL. 1523 ENTERED INLAND WATERS. 1527 C/C TO 335.° C/S TO 12.Ø KTS. 1530 PASSED BOUY NO. 1 ABEAM TO PORT. COMMENCED STEERING VARIOUS COURSES AT VARIOUS SPEEDS CONFORMING TO PEARL HARBOR CHANNEL. 1545 MOORED PORT SIDE TO BERTH A-5 U.S. NAVAL BASE, PEARL HARBOR, HAWAII. 1548 SECURED SPECIAL SEA AND ANCHOR DETAIL.

*R. M. Markie*, Ensign, USNR

16-20 Moored as before.

*J. M. Whinn* LTJG, USN

20-24 Moored as before.

*J. M. Whinn* LTJG, USN

APPROVED:

*W. J. Olsen*

U.S.N. COMMANDING

EXAMINED:

*A. H. Lantho*

U.S.N. NAVIGATOR

TO BE FORWARDED TO THE BUREAU OF NAVAL PERSONNEL AT THE END OF EACH MONTH



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

ISS ARIKARA ATF-98 ZONE DESCRIPTION +10W DATE TUE 22 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISIBILITY (Miles)	WEATHER (Symbols)	BAROMETER (Inches)	TEMPERATURE		CLOUDS			SEA WATER TEMPERATURE	WAVES	
	DIRECTION (True)	SPEED (knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIRECTION (True)	HEIGHT (Feet)
01	045	2	10	SCT	30.01	84	75	5	2000	CU			
02	045	2	10	SCT	30.01	84	75	5	2000	CU			
03	045	2	10	SCT	29.99	83	74	5	2000	CU			
04	—	0	10	SCT	29.98	82	74	5	2000	CU			
05	—	0	10	SCT	29.99	81	74	5	2000	CU			
06	—	0	10	SCT	29.99	81	74	5	2000	CU			
07	—	0	10	SCT	30.01	84	75	5	2000	CU			
08	060	4	10	SCT	30.01	84	75	4	2000	CU			
09	060	4	10	SCT	30.01	84	75	4	2000	CU	82	080	3
10	060	4	10	SCT	30.00	82	73	4	2000	CU	82	080	3
11	060	4	10	SCT	30.00	82	73	4	2000	CU	82	080	3
12	060	10	10	SCT	30.00	82	73	4	2000	CU	82	080	3
13	080	10	10	SCT	29.99	82	73	4	2000	CU	82	080	3
14	080	8	10	SCT	29.99	80	75	5	2000	CU	82	080	3
15	080	7	10	SCT	29.99	80	75	5	2000	CU	82	080	3
16	080	5	10	SCT	29.98	80	75	5	2000	CU			
17	080	4	10	SCT	29.98	80	75	5	2000	CU			
18	060	2	10	BKN	29.99	81	73	7	1800	CU			
19	060	2	10	BKN	30.01	81	73	7	1800	CU			
20	060	2	10	BKN	30.02	80	72	7	1800	CU			
21	060	2	10	BKN	30.02	79	72	7	1800	CU			
22	060	2	10	BKN	30.02	77	74	7	1800	CU			
23	060	3	10	BKN	30.02	77	73	7	1800	CU			
24	060	2	10	BKN	30.04	77	73	7	1800	CU			

POSITION ZONE TIME

0800  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

1200  
L 21-14N BY 3  
λ 157-53W BY 3

2000  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA

FROM \_\_\_\_\_ (2T) \_\_\_\_\_ (Date)  
TO \_\_\_\_\_ (2T) \_\_\_\_\_ (Date)

SET \_\_\_\_\_  
DRIFT \_\_\_\_\_

POSITION BETWEEN FIXES

MID. L \_\_\_\_\_  
MID. λ \_\_\_\_\_

MILES STEAMED 0000-2400  
35

FUEL CONSUMED 0000-2400  
504

## REMARKS

ΦΦ-Φ4 Moored port side to berth A-5, U.S. Naval Base, Pearl Harbor, Hawaii with standard mooring lines doubled. Receiving miscellaneous services from the pier. Ships present include various units of the U.S. Pacific Fleet, Yard and District craft. Material Condition Yoke is set. SOPA is CINCPACFLT.

*J. M. Whinn* LTJG, USN

Φ4-Φ8 Moored as before. Φ7Φ5 Mustered the crew at quarters. Absentees, none. Φ72Φ Set Special Sea and Anchor Detail. Φ737 Underway from berth A-5, U.S. Naval Base, Pearl Harbor, Hawaii to local operating areas in accordance with COMFLETRAGRU PEARL OP-ORDER 43-63. Steaming at various courses and speeds to conform with channel. Φ755 Buoys 1 and 2 abeam. Φ757 Made daily inspection of magazines and smokeless powder samples. Conditions, normal. Secured from Special Sea and Anchor Detail.

APPROVED:

*J. M. Whinn*  
U.S.N. COMMANDING

EXAMINED:

*J. M. Whinn*  
U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98TUE 22 OCT, 1963  
(Day) (Date) (Month)

08-12 Steaming as before. 0802 Entered International Waters on CS 153, sp 12 KT. 0806 1/2 to 130, 1/2 to 0 KT. 0809 Commenced steering Casualty Drills. 0829 1/2 to 0836 Secured from steering Casualty Drills. 1/2 to 090. 0907 1/2 to 4 KT. 0926 1/2 to 6 KT, 1/2 to 270. 0958 Commenced Surface Tracking Exercise. 1121 Secured from Surface Tracking Exercise. 1123 1/2 to 090.

*J. H. Whinn* LTJG, USN

12-16 STEAMING AS BEFORE. 1223 1/2 TO 10.0 KTS. 1226 C/C TO 080. 1304 1/2 TO ALL STOP. COMMENCED EXERCISE Z-6-S WITH U.S.S. ABNAKI (ATF 96). 1310 ABNAKI ALONGSIDE TO PASS MESSENGER. 1322 TOW WIRE FAST. 1330 ABNAKI COMMENCED TOWING. 1347 CAST OFF TOW WIRE. 1355 ALL LINES CLEAR. COMMENCING APPROACH ON ABNAKI. 1411 PASSED MESSENGER TO ABNAKI. 1420 TOW WIRE FAST. 1421 ABNAKI CAST OFF TOW WIRE. 1425 ALL LINES CLEAR. SECURED FROM Z-6-S. COMMENCED SERVICES TO U.S.S. HITCHITI (ATF 103) FOR EXERCISE Z-10-CC, MANEUVERING VARIOUS COURSES AND SPEEDS. 1452 WENT TO GENERAL QUARTERS. 1427 SET MATERIAL CONDITION ZEBRA. COMMENCED DC/ENG. EXERCISES. 1509 28 1528 SECURED FROM EXERCISE Z-10-CC. STEADY COURSE 350° SPEED 12.0 KTS.

*E. J. Bach* LTJG, USNR

16-20 Steaming as before. 1614 Set material condition Yoke Secured from general quarters. 1615 Set the special sea detail. 1617 C/C to 333. Commenced maneuvering on various courses at and speeds to conform to the R channel. Entered inland waters. 1625 Passed No. 1 and 2 sea buoys. 1639 Moved port side to berth A-5, U.S. Naval R Naval Base, Pearl Harbor, Hawaii with standard mooring lines doubled. 1640 Secured the special sea detail.

*A. H. Rautto* CBow USN

20-24 Moored as before.

APPROVED:

*[Signature]*

U.S.N. COMMANDING

EXAMINED:

*A. H. Rautto* CBow USN

*A. H. Rautto*

U.S.N. NAVIGATOR



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98ZONE DESCRIPTION TIOW

DATE

WED23OCT, 19 63AT/PASSAGE FROM PEARL HARBOR, HAWAII

TO

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI- BIL- ITY (Miles)	WEATH- ER (Sym- bols)	BAROM- ETER (Inches)	TEMPER- ATURE		CLOUDS			SEA WATER TEMPER- ATURE	WAVES	
	DIREC- TION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC- TION (True)	HEIGHT (Feet)
01	060	3	10	BKN	30.01	77	73	7	1400	CU			
02	060	2	10	BKN	30.01	77	73	7	1800	CU			
03	060	3	10	SCT	30.00	77	73	4	1800	CU			
04	040	2	10	SCT	29.97	78	74	4	1800	CU			
05	040	2	10	SCT	29.98	78	74	4	1800	CU			
06	050	2	10	SCT	29.97	76	73	4	1800	CU			
07	045	3	10	SCT	29.99	80	75	4	1800	CU			
08	060	5	10	SCT	30.01	80	75	4	1800	CU			
09	060	7	10	SCT	30.03	80	75	4	1800	CU			
10	060	9	10	BKN	30.06	80	75	6	1800	CU	82	090	2
11	060	9	10	BKN	30.03	80	75	6	1800	CU	82	090	2
12	060	9	10	BKN	30.00	80	75	6	1800	CU	82	080	2
13	060	7	10	BKN	29.97	80	75	6	1800	CU	82	080	2
14	070	5	10	SCT	29.94	80	75	4	1800	CU			
15	070	4	10	SCT	29.92	80	75	4	1800	CU			
16	070	4	10	SCT	29.93	80	75	4	1800	CU			
17	070	5	10	BKN	29.93	83	75	7	1800	CU			
18	070	5	10	BKN	29.94	80	74	8	1800	CU			
19	070	5	10	BKN	29.95	80	74	8	1800	CU			
20	070	3	10	BKN	29.97	79	72	6	1800	CU			
21	070	3	10	BKN	29.98	79	72	6	1800	CU			
22	070	3	10	BKN	29.98	81	73	9	1800	CU			
23	070	4	10	R	29.99	80	72	10	1800	CU			
24	070	4	10	R	29.98	80	72	10	1800	CU			

POSITION	ZONE	TIME
0800		
L		BY
λ		BY
1200		
L	<u>21-15.9 N</u>	BY <u>3</u>
λ	<u>157-54 W</u>	BY <u>3</u>
2000		
L		BY
λ		BY

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA		
FROM		(Date)
TO		(Date)
SET		
DRIFT		
POSITION BETWEEN FIXES		
MID. L		
MID. λ		

MILES STEAMED 0000-2400
<u>42.5</u>

FUEL CONSUMED 0000-2400
<u>462</u>

## REMARKS

00-09 Moored port side to berth A-5, U.S. Naval Base, Pearl Harbor, Hawaii with standard mooring lines doubled. Receiving miscellaneous services from the pier. Material condition code is set. Ships present include various units of the U.S. Pacific Fleet, Yard and District Craft. SOPA is CINCPACFLT.

A.H. Lantto ClBosn USN

09-08 Moored as before. 0705 Mustered the crew at quarters. Absentees: none. 0738 Set the special sea detail. 0755 Underway for local operations in accordance with COMFLTRAGRU OP-ORDER 43-63. Manuevering R. Commenced maneuvering on various courses and speeds to conform to the channel.

A.H. Lantto ClBosn USN

APPROVED:

U.S.N. COMMANDING

EXAMINED:

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98WED 23 OCT 63  
(Day) (Date) (Month), 1963

08-12 Steaming as before. 0812 Buoys 1 and 2 abeam. 0825 Entered International Waters on cs 258, sp 8 KT. 0831 1/2 to 263. 0834 1/2 to 195. Made daily inspection of magazines and smokeless powder samples. Conditions normal. 0854 1/2 to 125, 1/2 to 12 KT. 0900 1/2 to 090. 0904 All stop. Dropped barrel for USS ABNAKI (ATF-96) Search and rescue exercise. 0912 1/2 to 8 KT. 0915 Commenced steering casualty drill. 0920 Secured from steering casualty drill. 0959 1/2 to 270. 1003 1/2 to 4 KT. 1005 Went to General Quarters, set Material Condition Zebra. 1009 Commenced Damage Control Drills. 1041 1/2 to 180, 1/2 to 13.5 KT. 1048 1/2 to 000, 1/2 to 4 KT. 1115 1/2 to 011. 1/2 to 8 KT. 1118 Commenced steering various courses for compass compensation. 1125 Material Secured from Damage Control Drills. Material Condition Yoke set, secured from General Quarters. 1140 Secured from compass compensation, steady on cs 090. 1/2 to 4 KT. Commenced Engineering Drills.

J. J. [Signature] LTJG, USN

12-16 STEAMING AS BEFORE. 1201 SECURED FROM ENGINEERING DRILLS. 1208 COMMENCED MAN OVERBOARD DRILL. 1224 SECURED FROM DRILL. 1225 C/C TO 311. C/S TO 5.0 KTS. 1312 C/C TO 333. 1320 1309 C/S TO 12.0 KTS. 1312 C/C TO 333. 1320 ENTERED INLAND WATERS. 1333 MANEUVERING VARIOUS COURSES AND SPEEDS TO CONFORM TO THE CHANNEL AND MAKE BERTH. 1343 MOORED PORT SIDE TO BERTH A5 U.S. NAVAL BASE, PEARL HARBOR, HAWAII WITH STANDARD MOORING LINES DOUBLED. 1347 SECURED FROM SPECIAL SEA AND ANCHOR DETAIL.

E. C. [Signature] LTJG, USNR

16-20 MOORED AS BEFORE.

E. C. [Signature] LTJG, USNR

20-24 MOORED AS BEFORE.

E. C. [Signature] LTJG, USNR

APPROVED:

[Signature]

U.S.N. COMMANDING

EXAMINED:

A. H. [Signature]

U.S.N. NAVIGATOR

TO BE FORWARDED TO THE BUREAU OF NAVAL PERSONNEL AT THE END OF EACH MONTH



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION +10W DATE THUR 24 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI- BIL- ITY (Miles)	WEATH- ER (Sym- bols)	BAROM- ETER (Inches)	TEMPER- ATURE		CLOUDS			SEA WATER TEMPER- ATURE	WAVES	
	DIREC- TION (True)	SPEED (knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC- TION (True)	HEIGHT (Feet)
01	050	3	10	OVC	29.96	79	71	10	1800	CU			
02	050	3	10	OVC	29.94	74	74	10	1800	CU			
03	050	3	10	OVC	29.94	74	74	10	1800	CU			
04	050	3	10	OVC	29.94	74	74	10	1800	CU			
05	050	3	10	OVC	29.93	74	74	10	1800	CU			
06	050	2	10	OVC	29.95	75	74	10	1800	CU			
07	050	2	10	OVC	29.99	76	75	10	1800	CU			
08	050	2	10	OVC	30.00	79	77	10	1800	CU			
09	050	4	10	BKN	30.00	80	77	8	1800	CU			
10	050	4	10	BKN	29.98	81	77	8	1800	CU			
11	045	4	10	BKN	29.96	82	77	6	1800	CU			
12	045	6	10	BKN	29.96	83	76	6	1800	CU			
13	045	6	10	SCT	29.98	84	76	5	1800	CU			
14	045	6	10	SCT	29.96	85	76	5	1800	CU			
15	045	5	10	SCT	29.94	85	77	5	1800	CU			
16	045	5	10	SCT	29.94	86	77	5	1800	CU			
17	045	3	10	SCT	29.97	87	76	5	1800	CU			
18	045	3	10	SCT	29.99	85	76	5	1800	CU			
19	040	2	10	SCT	30.00	84	76	5	1800	CU			
20	040	2	10	SCT	30.00	83	75	5	1800	CU			
21	040	2	10	SCT	30.00	83	75	5	1800	CU			
22	040	2	10	SCT	30.00	83	75	5	1800	CU			
23	040	2	10	SCT	30.00	83	75	5	1800	CU			
24	040	2	10	SCT	30.00	80	72	5	1800	CU			

POSITION ZONE TIME

0800  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

1200  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

2000  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA

FROM \_\_\_\_\_ (ZT) (Date)  
TO \_\_\_\_\_ (ZT) (Date)

SET \_\_\_\_\_  
DRIFT \_\_\_\_\_

POSITION BETWEEN FIXES

MID. L \_\_\_\_\_  
MID. λ \_\_\_\_\_

MILES STEAMED  
0000-2400  
7

FUEL CONSUMED  
0000-2400  
563

## REMARKS

00-04 MOORED PORT SIDE TO BERTH A5, U.S. NAVAL BASE, PEARL HARBOR, HAWAII WITH STANDARD MOORING LINES DOUBLED, RECEIVING MISC. SERVICES FROM THE PIER. SHIPS PRESENT INCLUDE VARIOUS UNITS OF THE U.S. PACIFIC FLEET, YARD AND DISTRICT CRAFT. MATERIAL CONDITION YOKE IS SET THROUGH-OUT THE SHIP. SOPA IS CINCPACFLT.

*E.C. [Signature]* LTJG. USNR.

04-08 MOORED AS BEFORE. 0705 MUSTERED THE CREW AT QUARTERS. ABSENTEES: NONE. 0755 MADE DAILY INSPECTION OF MAGAZINES AND SMOKELESS POWDER SAMPLES. CONDITIONS NORMAL. MADE WEEKLY TEST OF MAGAZINE SPRINKLING SYSTEM. TEST SATISFACTORY.

APPROVED:

*[Signature]*  
U.S.N. COMMANDING

EXAMINED:

*E.C. [Signature]* LTJG. USNR.  
*[Signature]* U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98THUR 24 OCT, 1963  
(Day) (Date) (Month)

08-12 MOORED AS BEFORE. 0812 SET SPECIAL SEA AND ANCHOR  
DETAIL. 0831 UNDERWAY FROM BERTH A-5 ENROUTE <sup>MIDDLE</sup> WEST LOCH, <sup>Rm</sup>  
PEARL HARBOR, HAWAII I.A.W. COMFLETRAGRU PEARL OPS-SKED  
43-63. COMMAND COMMENCED STEERING VARIOUS COURSES AT <sup>Rm</sup>  
VARIOUS SPEEDS CONFORMING TO PEARL HARBOR CHANNEL. 0858  
ANCHORED IN <sup>MIDDLE</sup> WEST LOCH, U.S. NAVAL BASE IN 7.0 FATHOMS OF WATER, <sup>Rm</sup>  
MUD BOTTOM, WITH 15 FATHOMS OF CHAIN AT THE WATERS <sup>EDGE</sup>  
ON THE FOLLOWING ANCHORAGE BEARINGS: FORD ISLAND <sup>CONTROL</sup> 210°, <sup>Rm</sup>  
REAR RANGE 250°, RIGHT TANGENT MOKUNUI ISLAND 150°.  
COMMENCED EXERCISE Z-40-5. 0901 PASSED MESSENGER TO BOUY  
X-12-5. 0925 SECURED TOW WIRE TO BOUY X-12-5. 1007 COMMENCED  
HEAVING IN ANCHOR. 1008 ANCHOR AWEIGH. COMMENCED MANEUVERING  
VARIOUS COURSES AND SPEEDS I.A.W. EXERCISE Z-40-5. 1034  
ANCHORED IN <sup>MIDDLE</sup> WEST LOCH, U.S. NAVAL BASE, PEARL HARBOR, HAWAII <sup>Rm</sup>  
IN 6.0 FATHOMS OF WATER, MUD BOTTOM, WITH 15 FATHOMS OF  
CHAIN TO THE STARBOARD ANCHOR ON THE FOLLOWING  
ANCHORAGE BEARINGS: FORD ISLAND CONTROL 200°, REAR RANGE  
250°, RIGHT TANGENT MOKUNUI ISLAND 146°. 1038 COMMENCED  
HEAVING IN TOW WIRE FROM BOUY X-12-5. 1040 COMMENCED  
HEAVING IN ANCHOR. 1045 ALL LINES FROM BOUY ON DECK.  
ANCHOR AWEIGH. 1047 UNDERWAY FROM <sup>MIDDLE</sup> WEST LOCH ENROUTE <sup>Rm</sup>  
TO BERTH A-5. COMMENCED STEERING VARIOUS COURSES AT  
VARIOUS SPEEDS CONFORMING TO PEARL HARBOR CHANNEL.  
1120 MOORED BERTH A-5, U.S. NAVAL BASE, PEARL HARBOR,  
HAWAII. 1123 SECURED SPECIAL SEA AND ANCHOR DETAIL.

*B.M. Mackee, Ensign, USNR.*

12-16 Moored as before

*B.O. Ennink*  
LTJG USN.

16-20 Moored as before

*B.O. Ennink*  
LTJG USN.

20-24 Moored as before

*B.O. Ennink*  
LTJG USN.

APPROVED:

*W. J. Olsen*

U.S.N. COMMANDING

EXAMINED:

*A. J. Pault*

U.S.N. NAVIGATOR

TO BE FORWARDED TO THE BUREAU OF NAVAL PERSONNEL AT THE END OF EACH MONTH



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION 110W DATE FRI 25 OCT, 19 63  
 (Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI-BIL-ITY (Miles)	WEATH-ER (Sym-bols)	BAROM-ETER (Inches)	TEMPER-ATURE		CLOUDS			SEA WATER TEMPER-ATURE	WAVES	
	DIREC-TION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC-TION (True)	HEIGHT (Feet)
01	045	2	10	SCT	30.00	80	72	4	1800	CU			
02	045	2	10	SCT	30.00	78	71	4	1800	CU			
03	045	2	10	SCT	29.96	78	70	4	1800	CU			
04	045	2	10	SCT	29.96	78	70	4	1800	CU			
05	045	2	10	SCT	29.97	77	70	4	1800	CU			
06	045	1	10	SCT	30.00	78	70	4	1800	CU			
07	045	2	10	SCT	30.03	79	71	4	1800	CU			
08	095	8	10	SCT	30.05	80	73	3	2800	CU			
09	095	14	10	SCT	30.08	81	75	3	2800	CU	81	120	3
10	095	15	10	SCT	30.08	87	76	2	2800	ST/CU	81	120	3
11	095	9	10	SCT	30.07	84	76	3	2800	ST/CU	81	120	3
12	095	10	10	SCT	30.06	85	77	3	2800	ST/CU	81	125	3
13	070	18	10	SCT	30.04	81	76	3	2800	ST/CU	81	125	3
14	070	19	10	SCT	30.05	80	75	3	2800	ST/CU	80	125	3
15	070	18	10	SCT	30.03	80	75	3	2800	ST/CU	80	125	3
16	000	6	10	SCT	30.00	80	75	3	1800	CU			
17	000	7	10	SCT	29.98	81	73	2	1800	CU			
18	000	7	10	SCT	29.98	81	73	2	1800	CU			
19	000	7	10	SCT	29.99	81	73	2	1800	CU			
20	000	3	10	SCT	30.00	80	75	2	1800	CU			
21	000	4	10	SCT	30.01	80	75	2	1800	CU			
22	000	4	10	SCT	30.02	80	75	2	1800	CU			
23	000	4	10	SCT	30.02	80	75	2	1800	CU			
24	000	4	10	SCT	30.00	80	75	2	1800	CU			

POSITION	ZONE	TIME
0800		
L _____	BY _____	
λ _____	BY _____	
1200		
L <u>21-33N</u>	BY <u>1</u>	
λ <u>158-47W</u>	BY <u>1</u>	
2000		
L _____	BY _____	
λ _____	BY _____	

LEGEND: 1 - CELESTIAL  
 2 - ELECTRONIC  
 3 - VISUAL  
 4 - D. R.

CURRENT DATA	
FROM _____	(Date)
TO _____	(Date)
SET _____	
DRIFT _____	
POSITION BETWEEN FIXES	
MID. L _____	
MID. λ _____	

MILES STEAMED  
 0000-2400

102

FUEL CONSUMED  
 0000-2400

315

## REMARKS

00-04 Moved port side to B A-5. U.S. Naval Base, Pearl Harbor, Hawaii with standard morning line doubled. Ships present, include various units of the U.S. Pacific Fleet. Good Harbor and District Craft. Material Condition Yellow is set. SOPA is CINC PACFLT. Receiving various services from the pier.

B. J. Emick, LTJG, USN.

04-08 Moved as before 0705 Maintained the crew at quarters. Absentee: None 0710 Set special sea detail. 0735 Unloading from A-5 to Port Allen Kauai, Hawaii IAW COM HAW JEA FROM 242117 Z. Maneuvering at various corners and speeds to engage to harbor. 0749 Passed sea buoy #1 & 2 abeam. 0758 Entered international waters. Sea detail for my Steaming on CS 223, sp 13.5 kts.

B. J. Emick, LTJG, USN.

APPROVED:

*[Signature]*

U.S.N. COMMANDING

EXAMINED:

*[Signature]*

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98FRI 25 OCT, 1963  
(Day) (Date) (Month)

08-12 Steaming as before. 0801 4c to 270. 0813 made daily inspection of magazines and smokeless powder samples. Conditions normal. 0837 4c to 294. 1000 Commenced full power run.

*John W. ...* LTJG, USN

12-16 STEAMING AS BEFORE. 1243 SIGHTED ISLAND OF KAUAI BEARING 314 RANGE 31 MI. 1317 C/C TO 294. 1456 C/C TO 317 C/S TO 8.0 KTS. 1510 C/S TO 6.0 KTS. 1512 SET SPECIAL SEA AND ANCHOR DETAIL. 1520 C/C TO 000. 1523 MANEUVERING VARIOUS COURSES AND SPEEDS TO CONFORM TO HANAPEPE BAY CHANNEL AND MAKE BERTH. 1540 MOORED PORT SIDE TO SOUTH SIDE OF PIER AT PORT ALLEN, HAWAII WITH STANDARD MOORING LINES DOUBLED. 1552 SECURED SPECIAL SEA AND ANCHOR DETAIL.

*EC ...* LTJG, USNR

16-20 MOORED AS BEFORE.

*BM ...* Ensign, USNR

20-24 MOORED AS BEFORE.

*BM ...* Ensign, USNR

APPROVED:

*...*

U.S.N. COMMANDING

EXAMINED:

*A. H. Racette*

U.S.N. NAVIGATOR



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION tiow DATE SAT 26 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PORT ALLEN, KAUAI TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI- BIL- ITY (Miles)	WEATH- ER (Sym- bols)	BAROM- ETER (Inches)	TEMPER- ATURE		CLOUDS			SEA WATER TEMPER- ATURE	WAVES	
	DIREC- TION (True)	SPEED (knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC- TION (True)	HEIGHT (Feet)
01	040	4	10	SCT	30.00	80	71	2	1800	CU			
02	040	4	10	SCT	29.99	80	70	2	1800	CU			
03	040	4	10	SCT	29.98	79	70	2	1800	CU			
04	040	5	10	SCT	29.96	79	70	2	1800	CU			
05	040	5	10	SCT	29.96	79	70	2	1800	CU			
06	040	5	10	SCT	29.97	79	70	3	1800	CU			
07	040	3	10	SCT	29.98	79	72	3	1800	CU			
08	040	3	10	SCT	30.00	78	75	5	1800	CU			
09	040	3	10	SCT	30.00	80	76	4	1800	CU			
10	040	2	10	SCT	30.00	83	76	4	1800	CU			
11	040	2	10	SCT	30.02	85	77	4	1800	CU			
12	020	5	10	SCT	29.98	89	83	4	1800	CU			
13	020	5	10	SCT	29.98	92	87	3	1800	CU			
14	020	5	10	SCT	29.93	90	83	3	1800	CU			
15	020	5	10	SCT	29.93	90	83	3	1800	CU			
16	020	5	10	SCT	29.94	84	71	3	1800	CU			
17	020	4	10	SCT	29.96	84	71	3	1800	CU			
18	020	4	10	SCT	29.94	80	75	3	1800	CU			
19	020	4	10	SCT	29.94	80	75	3	1800	CU			
20	020	3	8	SCT	29.96	76	74	3	1800	CU			
21	020	3	8	SCT	29.98	76	73	3	1800	CU			
22	020	3	8	SCT	29.98	76	73	3	1800	CU			
23	020	3	8	SCT	29.98	75	73	3	1800	CU			
24	020	2	5	SCT	29.99	76	69	2	1800	CU			

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA

FROM \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)  
TO \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)

SET \_\_\_\_\_  
DRIFT \_\_\_\_\_

POSITION BETWEEN FIXES

MID. L \_\_\_\_\_  
MID. λ \_\_\_\_\_

MILES STEAMED  
0000-2400  
0

FUEL CONSUMED  
0000-2400  
315

## REMARKS

04-04 MOORED PORT SIDE <sup>SOUTH SIDE</sup> TO PORT ALLEN PIER, PORT ALLEN, HAWAII RM  
WITH STANDARD MOORING LINES DOUBLED. SHIPS PRESENT INCLUDE  
USS ARIKARA (ATF-98) AND VARIOUS HARBOR CRAFT. SOPA IS  
C.O., USS ARIKARA (ATF-98). MATERIAL CONDITION YOKE IS SET  
THROUGHOUT THE SHIP.

R.M. Markes, Ensign, USNR

04-08 MOORED AS BEFORE.

R.M. Markes, Ensign, USNR

APPROVED:

*[Signature]*  
U.S.N. COMMANDING

EXAMINED:

*[Signature]*  
U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98SAT 26 OCT, 1963  
(Day) (Date) (Month)

08-12 Moored as before. 0805 Mustered the crew on stations. ~~no~~ Absentees: none. 0900 Made daily inspection of magazines and smokeless powder samples. Conditions: normal.

*J. H. Whinn* LTJG, USN

12-16 Moored as before.

*J. H. Whinn* LTJG, USN

16-20 Moored as before.

*J. H. Whinn* LTJG, USN

20-24 Moored as before.

*J. H. Whinn* LTJG, USN

APPROVED:

U.S.N. COMMANDING

EXAMINED:

U.S.N. NAVIGATOR



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION HIOW DATE SUN 27 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PORT ALLEN, KAUAI TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI-BIL-ITY (Miles)	WEATH-ER (Sym-bols)	BAROM-ETER (Inches)	TEMPER-ATURE		CLOUDS			SEA WATER TEMPER-ATURE	WAVES	
	DIREC-TION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC-TION (True)	HEIGHT (Feet)
01	020	4	5	SCT	29.98	78	71	2	1800	CU			
02	000	3	4	SCT	29.96	76	69	2	1800	CU			
03	000	3	4	SCT	29.96	76	69	2	1800	CU			
04	000	3	4	SCT	29.96	76	69	2	1800	CU			
05	000	3	4	SCT	29.94	77	69	2	1800	CU			
06	000	3	4	SCT	29.97	77	69	3	1800	CU			
07	000	3	4	SCT	29.99	79	70	3	1800	CU			
08	010	3	8	SCT	29.99	78	73	3	1800	CU			
09	010	3	9	SCT	30.01	85	76	3	1800	CU			
10	010	3	10	SCT	30.01	85	76	3	1800	CU			
11	010	3	10	SCT	30.01	85	76	3	1800	CU			
12	010	4	10	SCT	29.98	94	78	5	1800	CU			
13	010	4	10	SCT	29.98	94	78	5	1800	CU			
14	010	4	10	SCT	29.96	94	78	5	1800	CU			
15	010	4	10	BKN	29.96	94	78	7	1800	CU			
16	050	10	10	BKN	29.96	81	75	7	1800	CU			
17	050	10	10	BKN	29.96	81	75	7	1500	CU			
18	050	10	10	BKN	29.98	80	75	7	1500	CU			
19	050	10	10	BKN	29.98	80	75	7	1500	CU			
20	050	3	10	BKN	30.00	80	75	7	1500	CU			
21	050	3	8	BKN	30.01	80	75	7	1500	CU			
22	050	3	8	BKN	30.02	80	75	7	1500	CU			
23	050	3	8	BKN	30.01	81	75	7	1500	CU			
24	050	3	8	BKN	30.01	81	75	7	1500	CU			

POSITION	ZONE	TIME
0800		
L _____	BY _____	
λ _____	BY _____	
1200		
L _____	BY _____	
λ _____	BY _____	
2000		
L _____	BY _____	
λ _____	BY _____	

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA	
FROM _____	(ZT) _____ (Date) _____
TO _____	(ZT) _____ (Date) _____
SET _____	
DRIFT _____	
POSITION BETWEEN FIXES	
MID. L _____	
MID. λ _____	

MILES STEAMED 0000-2400
0

FUEL CONSUMED 0000-2400
336

## REMARKS

South side of  
φφ-φ4 Moored port side to Port Allen Pier, Port Allen, Hawaii with standard mooring lines doubled. Ships present include various harbor craft. Material Condition Yoke is set. SDPA is Commanding Officer, USS ARIKARA (ATF-98)

*[Signature]* LTJG, USN

φ4-φB Moored as before.

*[Signature]* LTJG, USN

APPROVED:

*[Signature]*

U.S.N. COMMANDING

EXAMINED:

*[Signature]*

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98SUN 27 OCT 1963  
(Day) (Date) (Month)

08-12 Moored as before. 0805 Mustered the crew on stations. Absentees: none. Made daily inspection of magazines and smokeless powder samples. Conditions normal.

A. H. Racette Ch Brn USN

12-16 Moored as before.

A. H. Racette Ch Brn USN

16-20 Moored as before.

A. H. Racette Ch Brn USN

20-24 Moored as before.

A. H. Racette Ch Brn USN

APPROVED:

U.S.N. COMMANDING

EXAMINED:

U.S.N. NAVIGATOR

TO BE FORWARDED TO THE BUREAU OF NAVAL PERSONNEL AT THE END OF EACH MONTH



## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION LOW DATE MON 28 OCT, 19 63  
(Day) (Date) (Month)AT/PASSAGE FROM PORT ALLEN, KAUAI TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISIBILITY (Miles)	WEATHER (Symbols)	BAROMETER (Inches)	TEMPERATURE		CLOUDS			SEA WATER TEMPERATURE	WAVES	
	DIRECTION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIRECTION (True)	HEIGHT (Feet)
01	090	3	10	BKN	30.01	80	72	7	1800	CU			
02	090	3	10	BKN	29.98	80	72	7	1800	CU			
03	090	3	10	BKN	29.98	80	72	7	1800	CU			
04	070	3	10	BKN	29.98	79	72	7	1800	CU			
05	070	3	10	BKN	29.98	79	72	7	1800	CU			
06	070	3	10	BKN	29.98	79	72	7	1800	CU			
07	070	3	10	BKN	30.00	81	72	7	1800	CU			
08	070	9	10	BKN	30.02	78	76	8	1800	CU			
09	070	9	10	BKN	30.04	78	76	8	1800	CU	81	090	2
10	070	9	10	BKN	30.06	79	77	8	1800	CU	81	090	2
11	080	9	10	BKN	30.04	79	77	8	1800	CU	81	090	2
12	080	7	10	BKN	30.02	81	75	9	1800	CU	81	090	2
13	080	9	10	BKN	30.00	81	75	9	1800	CU	81	090	2
14	080	10	10	BKN	29.98	81	75	9	1800	CU	81	090	2
15	080	4	10	BKN	29.98	81	75	9	1800	CU	81	090	2
16	080	4	10	BKN	29.98	81	75	9	1800	CU			
17	080	4	10	BKN	29.98	80	72	9	1800	CU			
18	040	4	10	L	30.00	78	72	9	1000	CU			
19	040	4	10	L	30.02	77	72	9	1000	CU			
20	040	2	6	R	30.05	81	75	10	1000	CU			
21	040	2	6	R	30.07	81	75	10	1000	CU			
22	040	2	6	BKN	30.07	82	76	8	1800	CU			
23	040	2	8	BKN	30.07	77	76	8	1800	CU			
24	040	2	8	BKN	30.07	78	77	8	1800	CU			

POSITION	ZONE	TIME
0800		
L _____	BY _____	
λ _____	BY _____	
1200		
L <u>21-29.2 N</u>	BY <u>1</u>	
λ <u>158-47 W</u>	BY <u>1</u>	
2000		
L _____	BY _____	
λ _____	BY _____	

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA			
FROM _____	(2T)	(Date)	
TO _____	(2T)	(Date)	
SET _____			
DRIFT _____			
POSITION BETWEEN FIXES			
MID. L _____			
MID. λ _____			

MILES STEAMED 0000-2400
<u>102</u>

FUEL CONSUMED 0000-2400
<u>908</u>

## REMARKS

00-04 Moored port side to south side of pier at Port Allen, Hawaii with standard mooring lines doubled. Ships present include U.S.S. Arikara (ATF-98) and various harbor craft. SOPA is C.O. U.S.S. Arikara (ATF-98). Material condition code is set.

A.H. Rauthe CL Bosn USN

04-08 Moored as before. 0705 Mustered the crew at quarters. Absentees: none. 0735 Set the special sea detail. 0752 Underway enroute to Pearl Harbor, Hawaii in accordance with COM HAWSEA FROM SPDLTR 210713Z 10 OCT 1963. Manoeuvring on various courses and speeds to conform to the channel. 0755 Made daily inspection of magazines and smokeless powder samples. Conditions normal.

A.H. Rauthe CL Bosn USN

APPROVED:

[Signature]

U.S.N. COMMANDING

EXAMINED:

A.H. Rauthe

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98MON 28 OCT 63  
(Day) (Date) (Month)

~~08-12~~ ~~UNDER~~ STEAMING AS BEFORE. ~~0807~~ SECURED SPECIAL ~~Rm~~  
SEA AND ANCHOR DETAIL. STDY CSE 114.0° SPD 13.5 KTS.  
1145 C/C TO 125°. 1155 C/C TO 114°

*Rm Markie, Ensign, USNR*

12-16 Steaming as before. 1352 Y/C to 104. 1445 Barbers  
Point light abeam to port, range about 2.3 miles. Y/C to  
087. 1526 Y/C to 325. Set Special Sea and Anchor Detail.  
~~Entered Inland Waters.~~ 1529 Y/S to 12KT. Y/C to 333. *Am*  
1531 Y/S to 10KT, Y/C to 335. 1532 Entered Inland  
Waters. Steaming at various courses and speeds to  
conform with channel. 1536 Buoys 1 and 2 abeam.  
1550. Moored port side to berth A-5, U.S. Naval Base,  
Pearl Harbor Hawaii with standard mooring lines  
doubled. 1553 Secured Special Sea and Anchor Detail.

*DD Whelan LTJG, USN*

16-20 MOORED AS BEFORE.

*EC Boehl LTJG, USNR*

*f* 20-24 MOORED AS BEFORE. 2000 SOPA PASSED  
TO ADMINO CINCPACFLT.

*EC Boehl LTJG, USNR*

APPROVED:

*Am Markie*

U.S.N. COMMANDING

EXAMINED:

*A. H. Lantier*

U.S.N. NAVIGATOR



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION TIOW DATE TUE 29 OCT, 19 63  
(Day) (Date) (Month)AT/PASSAGE FROM PEARL HARBOR, HAWAII TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISI- BIL- ITY (Miles)	WEATH- ER (Sym- bols)	BAROM- ETER (Inches)	TEMPER- ATURE		CLOUDS			SEA WATER TEMPER- ATURE	WAVES	
	DIREC- TION (True)	SPEED (knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIREC- TION (True)	HEIGHT (Feet)
01	-	0	10	SCT	30.04	80	76	5	1800	CU			
02	-	0	10	SCT	30.02	80	76	5	1800	CU			
03	-	0	10	SCT	30.01	80	76	5	1800	CU			
04	005	4	10	SCT	30.00	80	76	5	1800	CU			
05	005	4	10	SCT	30.00	80	75	5	1800	CU			
06	005	4	10	SCT	30.00	80	75	5	1800	CU			
07	005	3	10	BKN	30.02	80	75	7	1800	CU			
08	040	3	10	BKN	30.04	82	77	7	1800	CU			
09	040	5	10	BKN	30.06	82	77	7	1800	CU			
10	040	5	10	BKN	30.08	82	77	7	1800	CU			
11	095	7	10	BKN	30.08	84	80	7	1800	CU			
12	095	7	10	BKN	30.04	89	83	7	1800	CU			
13	095	7	10	BKN	30.02	89	83	7	1800	CU			
14	095	5	10	BKN	29.99	89	83	7	1800	CU			
15	095	6	10	BKN	29.98	89	83	7	1800	CU			
16	020	5	10	BKN	29.98	91	84	6	1800	CU			
17	020	5	10	BKN	29.98	90	83	6	1800	CU			
18	020	5	10	SCT	29.98	87	81	5	1800	CU			
19	020	5	10	SCT	29.98	87	81	5	1800	CU			
20	020	5	10	SCT	30.00	85	76	5	1800	CU			
21	020	4	10	SCT	30.02	80	72	5	1800	CU			
22	020	4	10	SCT	30.04	80	72	5	1800	CU			
23	020	4	10	SCT	30.04	78	70	5	1800	CU			
24	020	4	10	SCT	30.02	77	70	5	1800	CU			

POSITION	ZONE	TIME
0800		
L _____	BY _____	
λ _____	BY _____	
1200		
L _____	BY _____	
λ _____	BY _____	
2000		
L _____	BY _____	
λ _____	BY _____	

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA	
FROM _____	(ZT) _____ (Date) _____
TO _____	(ZT) _____ (Date) _____
SET _____	
DRIFT _____	
POSITION BETWEEN FIXES	
MID. L _____	
MID. λ _____	

MILES STEAMED  
0000-2400  
7FUEL CONSUMED  
0000-2400  
525

## REMARKS

~~00-04~~ MOORED PORT SIDE TO BERTH A5, U.S. NAVAL BASE, PEARL HARBOR, HAWAII WITH STANDARD MOORING LINES DOUBLED, RECEIVING MISCELLANEOUS SERVICES FROM THE PIER. SHIPS PRESENT INCLUDE VARIOUS UNITS OF THE U.S. PACIFIC FLEET, YARD AND DISTRICT CRAFT. MATERIAL CONDITION YOKE IS SET THROUGH-OUT THE SHIP. SOPA IS ADMINO CINCPACFLT.

*E. C. Bach* LTJG. USNR.

~~04-08~~ MOORED AS BEFORE. 0705 MUSTERED THE CREW AT QUARTERS. ABSENTEES: NONE. 0735 MADE DAILY INSPECTION OF \$ MAGAZINES AND SMOKELESS POWDER SAMPLES. CONDITIONS NORMAL.

*E. C. Bach* LTJG. USNR.

APPROVED:

*W. H. Olsen*

U.S.N. COMMANDING

EXAMINED:

*A. H. Smith*

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98TUE 29 OCT 63  
(Day) (Date) (Month)

08-12 MOORED AS BEFORE. 0822 SET SPECIAL SEA AND ANCHOR DETAIL. 0836 UNDERWAY FROM BERTH A5 TO BUOY X-12-S IAW VERBAL ORDERS COMNAVBASE PEARL MANEUVERING ON VARIOUS COURSES AND SPEEDS TO CLEAR BERTH AND CONFORM TO THE CHANNEL. 0900 ANCHORED IN MIDDLE LOCH, PEARL HARBOR, HAWAII IN 4.0 FATHOMS OF WATER, MUD BOTTOM, WITH 15 FATHOMS OF CHAIN TO THE STBD ANCHOR, ON THE FOLLOWING BEARINGS: REAR RANGE LT, 247.5; FORD IS. TOWER 199°; MOKUNI IS. 149°. 0902 PASSING MESSENGER TO BUOY X-12-S. 0908 PAYING OUT TOW WIRE FOR EXERCISE Z-40-S. 0929 TOW WIRE IS FAST TO BUOY. ANCHORS AWEIGH. MANEUVERING TO DROP LIVERPOOL BRIDLE. 0936 BRIDLE IS IN WATER. COMMENCED TAKING STRAIN. 0938 COMMENCED RECOVERY OF TOW WIRE AND BRIDLE. 0947 ALL LINES CLEAR. SECURED FROM EXERCISE. 0949 UNDERWAY FROM BUOY X-12-S TO BERTH A5, STEERING VARIOUS COURSES AND SPEEDS TO CONFORM TO THE CHANNEL AND MAKE BERTH. 1023 MOORED PORT SIDE TO BERTH A5, U.S. NAVAL STATION, PEARL HARBOR, HAWAII WITH STANDARD MOORING LINES DOUBLED. 1027 SECURED FROM SPECIAL SEA AND ANCHOR DETAIL.

*E. C. Back Jr.* LTJG. USNR.

12-16 Moored as before

*B. D. Smith*  
LTJR USN.

16-20 Moored as before

*B. D. Smith*  
LTJR USN.

20-24 Moored as before

*B. D. Smith*  
LTJR USN.

APPROVED:

*W. H. Olson*

U.S.N. COMMANDING

EXAMINED:

*A. H. Lattin*

U.S.N. NAVIGATOR

TO BE FORWARDED TO THE BUREAU OF NAVAL PERSONNEL AT THE END OF EACH MONTH



FOR OFFICIAL USE ONLY

NAVPERS 720 (Rev. 4-56)

## DECK LOG SHEET - TYPE B

USS ARIKARA ATF-98 ZONE DESCRIPTION TIOW DATE WED 30 OCT, 19 63  
 (Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO \_\_\_\_\_

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISIBILITY (Miles)	WEATHER (Symbols)	BAROMETER (Inches)	TEMPERATURE		CLOUDS			SEA WATER TEMPERATURE	WAVES	
	DIRECTION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIRECTION (True)	HEIGHT (Feet)
01	020	4	10	SCT	30.00	74	70	5	1800	CU			
02	020	4	10	SCT	29.98	74	70	5	1800	CU			
03	020	4	10	SCT	29.97	74	70	5	1800	CU			
04	010	3	10	SCT	29.95	77	71	4	1800	CU			
05	010	3	10	SCT	29.95	77	71	4	1800	CU			
06	010	3	10	SCT	29.95	78	72	4	1800	CU			
07	010	3	10	SCT	29.98	78	73	4	1800	CU			
08	010	3	10	SCT	30.00	80	73	2	1800	CU			
09	010	2	10	SCT	30.02	80	73	2	1800	CU			
10	040	2	10	SCT	30.00	81	74	1	1800	CU	81	120	1
11	040	4	10	SCT	29.98	83	75	1	1800	CU	81	120	1
12	040	4	10	SCT	29.96	84	76	1	1800	CU	81	120	1
13	040	6	10	SCT	29.94	84	76	1	1800	CU			
14	040	6	10	SCT	29.92	83	76	1	1800	CU			
15	040	6	10	SCT	29.90	83	75	1	1800	CU			
16	080	6	10	SCT	29.90	83	75	2	1800	CU			
17	080	6	10	SCT	29.91	81	72	3	1800	CU			
18	080	5	10	SCT	29.93	81	72	3	1800	CU			
19	080	5	10	SCT	29.95	81	72	3	1800	CU			
20	045	5	10	SCT	29.96	77	72	3	1800	CU			
21	045	4	10	SCT	29.98	75	72	3	1800	CU			
22	045	4	10	SCT	29.98	75	72	3	1800	CU			
23	045	4	10	SCT	29.98	75	72	3	1800	CU			
24	045	4	10	SCT	29.98	75	72	3	1800	CU			

POSITION ZONE TIME

0800  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

1200  
L 21-14 N BY 3  
λ 157-55 W BY 3

2000  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA

FROM \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)  
TO \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)

SET \_\_\_\_\_  
DRIFT \_\_\_\_\_

POSITION BETWEEN FIXES

MID. L \_\_\_\_\_  
MID. λ \_\_\_\_\_

MILES STEAMED 0000-2400  
43

FUEL CONSUMED 0000-2400  
480

## REMARKS

00-04 Moored port side to A-5 U.S. Naval Base, Pearl Harbor, Hawaii with standard mooring lines doubled. Receiving various services from the pier. Ship's present includes various units of the U.S. Pacific Fleet, Gun, Helicopter, and Helicopter Craft. Material Condition Yellow in set. SOPA is ADMINO CINCPAC FLT.

*B. J. Frank*  
LTJG USA.

04-08 Moored as before. 0705 Mustered the crew at quarters. Absent: None. 0732 Made daily inspection of messrooms and smokers pavilion. Single, Condition Normal.

APPROVED:

*William J. Miller*

U.S.N. COMMANDING

EXAMINED:

*B. J. Frank, LTJG, USN.*  
*P. H. Rattle*

U.S.N. NAVIGATOR



## ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98WED 30 OCT 63  
(Day) (Date) (Month), 1963

08-12 MOORED AS BEFORE. 0815 SET SPECIAL SEA AND ANCHOR DETAIL. 0832 UNDERWAY FROM BERTH A5 <sup>ENROUTE TO LOCAL OP AREAS</sup> ~~1AW~~ VERBAL ORDERS, COMNAVBASE PEARL MANEUVERING ON VARIOUS COURSES AND SPEEDS TO CLEAR BERTH AND CONFORM TO THE CHANNEL. 0857 0842 STEADY CSE 157° SPD 12.0 KTS. 0852 SECURED FROM SPECIAL SEA AND ANCHOR DETAIL. 0857 ENTERED INTERNATIONAL WATERS. 0920 C/C TO 115°. 0950 JOINED COMPANY WITH U.S.S. ELKHORN (AOG 7). 1000 COMM 0953 C/C TO 270° C/S TO 10.0 KTS 1000 COMMENCED TRACKING U.S.S. ABNAKI (ATF96) FOR EXERCISE Z-10-CC. 1111 SECURED FROM EXERCISE. 1112 C/C TO 090°. 1135 COMMENCED ENGINEERING CASUALTY DRILLS. 1140 C/C TO 120° C/S TO 4.0 KTS. 1143 C/C TO 330°.

*E.C. Baker* LTJG. USNR.

12-16 STEAMING AS BEFORE. 1216 SECURED FROM ENGINEERING DRILLS, STDY CSE 333. SPD 12.0 KTS. 1229 SET SPECIAL SEA AND ANCHOR DETAIL. 1232 ENTERED INLAND WATERS. COMMENCED STEERING VARIOUS COURSES AND SPEEDS CONFORMING TO PEARL HARBOR CHANNEL. 1239 PASSED BOUYS #1 AND #2 ABEAM. 1252 MOORED BERTH A-6, U.S. NAVAL BASE, PEARL HARBOR, HAWAII. 1256 SECURED SPECIAL SEA AND ANCHOR DETAIL.

*R.M. Markes*, Ensign, USNR

16-24 MOORED AS BEFORE.

*R.M. Markes*, Ensign, USNR

24-24 MOORED AS BEFORE.

*R.M. Markes*, Ensign, USNR.

APPROVED:

*Wm. A. Shaw*

U.S.N. COMMANDING

EXAMINED:

*A.H. Pauter*

U.S.N. NAVIGATOR

TO BE FORWARDED TO THE BUREAU OF NAVAL PERSONNEL AT THE END OF EACH MONTH



## DECK LOG SHEET - TYPE B

USS ARIKARA ATF 98 ZONE DESCRIPTION +10W DATE THUR 31 OCT, 19 63  
(Day) (Date) (Month)

AT/PASSAGE FROM PEARL HARBOR, HAWAII TO

## WEATHER OBSERVATIONS

ZONE TIME	WIND		VISIBILITY (Miles)	WEATHER (Symbols)	BAROMETER (Inches)	TEMPERATURE		CLOUDS			SEA WATER TEMPERATURE	WAVES	
	DIRECTION (True)	SPEED (Knots)				Dry Bulb	Wet Bulb	Amount (Tenths)	Height	Type		DIRECTION (True)	HEIGHT (Feet)
01	045	4	10	SCT	29.98	75	72	3	1800	CU			
02	045	4	10	SCT	29.96	76	72	3	1800	CU			
03	040	4	10	SCT	29.92	76	73	3	1800	CU			
04	040	4	10	SCT	29.91	76	73	3	1800	CU			
05	040	4	10	SCT	29.93	76	73	3	1800	CU			
06	040	4	10	SCT	29.94	76	73	3	1800	CU			
07	040	3	10	SCT	29.85	77	73	3	1800	CU			
08	040	3	10	SCT	29.96	78	73	3	1800	CU			
09	040	3	10	SCT	29.98	82	73	3	1800	CU			
10	040	4	10	SCT	29.98	88	75	4	1800	CU			
11	020	6	10	SCT	29.97	89	77	4	1800	CU			
12	020	4	10	SCT	29.95	89	77	5	1800	CU			
13	020	4	10	SCT	29.93	89	77	5	1800	CU			
14	020	4	10	SCT	29.91	86	76	5	1800	CU			
15	020	4	10	SCT	29.89	88	76	5	1800	CU			
16	020	3	10	SCT	29.89	88	76	5	1800	CU			
17	020	3	10	SCT	29.90	85	75	4	1800	CU			
18	020	2	10	SCT	29.92	83	74	4	1800	CU			
19	020	2	10	SCT	29.94	80	73	4	1800	CU			
20	—	0	10	SCT	29.97	80	73	3	1800	CU			
21	—	0	10	SCT	29.96	80	73	3	1800	CU			
22	—	0	10	SCT	29.97	80	73	3	1800	CU			
23	—	0	10	SCT	29.96	80	74	3	1800	CU			
24	—	0	10	SCT	29.96	80	74	3	1800	CU			

POSITION ZONE TIME

0800  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

1200  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

2000  
L \_\_\_\_\_ BY \_\_\_\_\_  
λ \_\_\_\_\_ BY \_\_\_\_\_

LEGEND: 1 - CELESTIAL  
2 - ELECTRONIC  
3 - VISUAL  
4 - D. R.

CURRENT DATA

FROM \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)  
TO \_\_\_\_\_ (ZT) \_\_\_\_\_ (Date)

SET \_\_\_\_\_  
DRIFT \_\_\_\_\_

POSITION BETWEEN FIXES

MID. L \_\_\_\_\_  
MID. λ \_\_\_\_\_

MILES STEAMED  
0000-2400  
0

FUEL CONSUMED  
0000-2400  
252

## REMARKS

ΦΦ-Φ4 MOORED STARBOARD SIDE TO BERTH A-6, U.S. NAVAL BASE, PEARL HARBOR, HAWAII WITH STANDARD MOORING LINES DOUBLED. RECEIVING MISCELLANEOUS SERVICES FROM THE PIER. SHIPS PRESENT INCLUDE VARIOUS UNITS OF THE U.S. PACIFIC FLEET, YARD AND DISTRICT CRAFT. SOPA IS ADMINO CINGPACFLT. MATERIAL CONDITION YOKE IS SET THROUGHOUT THE SHIP.

Rm Markee, Ensign, USNR

Φ4-Φ8 MOORED AS BEFORE. 0705 MUSTERED THE CREW AT QUARTERS. ABSENTEES: NONE. Φ725 MADE DAILY INSPECTION OF MAGAZINES AND SMOKELESS POWDER SAMPLES. CONDITIONS NORMAL. MADE WEEKLY TEST OF MAGAZINE SPRINKLING SYSTEM: TEST SATISFACTORY.

Rm Markee, Ensign, USNR

APPROVED:

*[Signature]*

U.S.N. COMMANDING

EXAMINED:

*[Signature]*

U.S.N. NAVIGATOR



FOR OFFICIAL USE ONLY

NAVPER 720 (Rev. 4-56)

ADDITIONAL REMARKS

UNITED STATES SHIP ARIKARA ATF-98

THUR 31 OCT 63  
(Day) (Date) (Month) 19

08-12 Moored as before. 1100 SOPA passed to  
COMASWFORPAC.

J. J. Whinn LTJG, USN

12-16 Moored as before.

J. J. Whinn LTJG, USN

16-20 Moored as before.

J. J. Whinn LTJG, USN

20-24 Moored as before.

J. J. Whinn LTJG, USN

APPROVED:

[Signature]

U.S.N. COMMANDING

EXAMINED:

[Signature]

U.S.N. NAVIGATOR

TO BE FORWARDED TO THE BUREAU OF NAVAL PERSONNEL AT THE END OF EACH MONTH